



TRANSPARENT HOSE

PVC-SYNTHETIC YARN REINFORCED

– OBSERVE YOUR FLUID FLOW –

CONSTRUCTION:

A high quality seamless PVC core, reinforced with high tensile strength synthetic yarn and a tough abrasion resistant cover. It is made with compounds using ingredients shown on the FDA approved list.

APPLICATIONS:


Air, Water or Mild Chemicals

TEMPERATURE RANGE:

-12°C to +54°C OR -10°F to +150°F

FEATURES

- High Working Pressures
- See Through Convenience
- Light Weight
- Highly Flexible
- Excellent Bend Radius Min. Bend Radius 5 x I.D.
- Electrically Non-Conductive
- Resistant to Most Chemicals
- Non-Marking
- Weather/Aging Resistant
- Ideal for Use on Chillers
- Food Grade PVC
- Approved for use in USDA Meat & Poultry Plants.

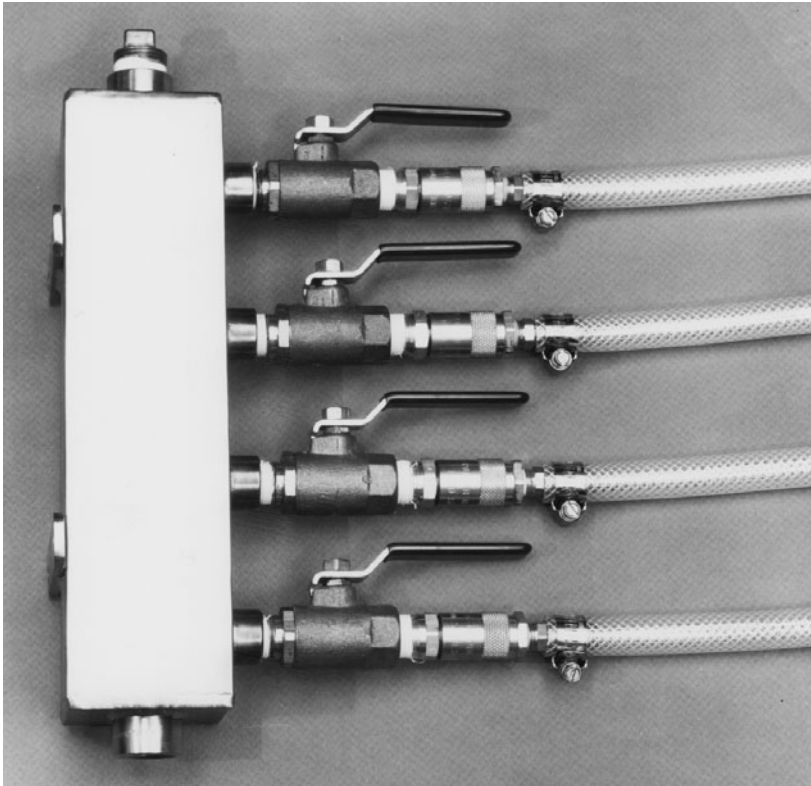

PART NUMBER	HOSE I.D. INCH	HOSE O.D. INCH	WORKING PRESSURE @ 70°F P.S.I.	ROLL QTY.	QUANTITY PRICES PER FT.	
					10-299 FT.	300+ FT.
102-02	1/8"	.312 in.	250	300 FT.	\$.18	\$.16
102-03	3/16"	.375 in.	250	300 FT.	0.19	0.17
102-04	1/4"	.468 in.	250	300 FT.	0.19	0.18
102-05	5/16"	.525 in.	250	300 FT.	0.24	0.23
102-06	3/8"	.625 in.	200	300 FT.	0.28	0.27
102-08	1/2"	.750 in.	200	300 FT.	0.40	0.38
102-10	5/8"	.875 in.	200	300 FT.	0.48	0.47
102-12	3/4"	1.031 in.	150	300 FT.	0.62	0.59
102-13	1"	1.312 in.	125	100 FT.	0.88	0.84
102-14	1-1/4"	1.750 in.	100	100 FT.	1.48	1.41
102-15	1-1/2"	2.000 in.	75	100 FT.	1.87	1.79
102-16	2"	2.500 in.	75	100 FT.	2.93	2.80



PLASTIC PROCESS EQUIPMENT, INC.

8303 CORPORATE PARK DRIVE, MACEDONIA (Cleveland), OHIO 44056, USA
216-367-7000 • Toll Free: 800-321-0562 • Fax: 216-367-7022 • Order Fax: 800-223-8305

www.ppe.com • e-mail: sales@ppe.com

Toll Free: USA, Canada & Mexico

800-362-0706

PPE WEST 3615 Walnut Avenue, Chino, California 91710, USA
909-627-8511 • 800-258-8877 • Fax: 909-627-8101

PPE SOUTH 11218 Challenger Avenue, Odessa, Florida 33556, USA
727-834-8888 • 800-282-6783 • Fax: 727-834-8873