



BRASS BALL VALVES


**GOOD QUALITY
BUDGET PRICED!**

The Budget Brass Ball Valves are ideal for normal flow applications requiring 2-piece body construction.

As in all Budget Brass Ball Valves, bottom loaded pressure retaining stems and packing nuts thread to the body to provide an extra margin of safety.

FEATURES

- Standard port for normal flow.
- Bottom loaded stem.
- Packing nut threaded to body.
- Chrome plated brass ball.
- 400 WOG rating.
- 1/4-Turn operation.
- Threaded ends comply with ANSI B2.1.
- Steel handle, vinyl grip.
- 150 WSP rating.
- Two piece construction.
- PTFE seats & seals.
- Temp. rating 300° F max.

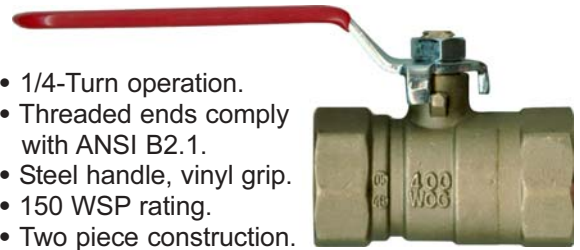

FEMALE X FEMALE

SIZE	CV RATING*	PORT SIZE DIAMETER	PART NO.	PRICES	
				1-9	10+
1/4"	10.8	25/64" (.391)	BBV-14	\$5.40	\$5.20
3/8"	10.8	25/64" (.391)	BBV-38	5.40	5.20
1/2"	10.8	25/64" (.391)	BBV-12	5.25	5.05
3/4"	23.5	19/32" (.594)	BBV-34	7.05	6.75
1"	43.9	25/32" (.781)	BBV-10	10.10	9.75
1-1/4"	48.0	1" (.980)	BBV-114	18.85	18.20
1-1/2"	70.0	1-1/4" (1.260)	BBV-112	26.85	25.80

MALE X FEMALE

SIZE	CV RATING*	PORT SIZE DIAMETER	PART NO.	PRICES	
				1-9	10+
1/4"	6.0	3/8" (.380)	BBV-1414	\$5.65	\$5.40
3/8"	6.0	3/8" (.380)	BBV-3838	5.65	5.40
1/2"	8.0	3/8" (.380)	BBV-1212	5.95	5.60
3/4"	20.0	19/32" (.590)	BBV-3434	9.10	8.80
1"	26.0	3/4" (.750)	BBV-1010	14.30	13.75
1-1/4"	48.0	1" (.980)	BBV-11414	21.60	20.75
1-1/2"	70.0	1-1/4" (1.260)	BBV-11212	32.55	31.40



MINI BRASS BALL VALVES

CHROME PLATED

ISO-9002

MANUFACTURED IN A
QUALITY SYSTEM CERTIFIED
FACILITY.

PPE industrial quality, one piece brass bar stock design Mini Brass Ball Valves provide the space savings necessary for small line fluid control applications. Designed for handling compressed air, water, fuels, gases, and other non-corrosive liquids in industrial applications that require compact ball valves. Top-of-the-line features include 235psi MWP Rating, PTFE ball seats for a positive seal in both directions, Viton stem seal, chrome plated brass ball and body for long life and extra corrosion resistance, bottom loaded stem for safety. Corrosion resistant nylon wing handle is compact, easy to use, and clearly shows ball position. Each valve is leak tested to ensure quality. Valve body functions as wrench flats for easy installation.



FEMALE X FEMALE



MALE X FEMALE

FEMALE X FEMALE

Part No.	Thread Size N.P.T.	QUANTITY PRICES	
		1-9	10+
FMV-0018	1/8"	\$5.25	\$5.00
FMV-0014	1/4"	4.95	4.70
FMV-0038	3/8"	4.95	4.70
FMV-0012	1/2"	5.35	5.10

MALE X FEMALE

MMV-0218	1/8"	\$4.90	\$4.70
MMV-0214	1/4"	5.00	4.75
MMV-0238	3/8"	5.00	4.75
MMV-0212	1/2"	5.75	5.45

- Temp Range: 32°F to 176°F
- Threads: Full N.P.T. made to ANSI standards B1.20.1
- Porting: Full on 1/8" & 1/4" sizes
Standard on 3/8" & 1/2" sizes
- Ball Seats: PTFE
- Body: Chrome plated brass hex, one piece forged
- Ball: Chrome plated brass
- Blowout-proof brass stem.
- Stem Seal: Viton
- MWP Rating: 235psi, will handle 300psi @ 75°F
- Handle: Nylon - corrosion resistant
- Each valve is seal tested for safety.
- Double seal system for operation in both directions.
- 1/4 turn handle with mechanical stop.



PLASTIC PROCESS EQUIPMENT, INC.

www.ppe.com • e-mail: sales@ppe.com

PPE WEST 6385 Montessouri Street, Las Vegas, Nevada 89113
702-433-6385 • 800-258-8877 • Fax: 702-433-6388

PPE SOUTH 11218 Challenger Avenue, Odessa, Florida 33556
727-834-8888 • 800-282-6783 • Fax: 727-834-8873

8303 CORPORATE PARK DRIVE, MACEDONIA (Cleveland), OHIO 44056, USA

216-367-7000 • Toll Free: 800-321-0562 • Fax: 216-367-7022 • Order Fax: 800-223-8305

Toll Free: USA, Canada & Mexico
800-362-0706