




Finger Grippers

*** It can attached BF-6, BF-5 M5 male barbed fitting or M5 male connector push-in air fitting & mounting by swivel cross clamp, angle clamp, swivel angle clamp, angle arm, elbow arm, spring loaded elbow arm, finger guide, finger sensor bracket, gripper extension tube


Part#	A	B	C	D	E	F	Wt.	Price
FG-1435	14	16	68	6	35°	M12x1	23g	\$123.85
FG-2035	20	23	93	8	35°	M17x1	60g	\$132.69

1. Features a magnetic piston
2. Use optional finger sensor bracket, LM-9 NPN or PNP sensor, finger guide, and gripper extension bracket
3. Maximum air pressure is 87 psi (6 bar)
4. Use dry and filtered air only
5. For gripping the part out of the mold and matching with vacuum cup to maintain the part steady when it is in transport

Application Examples

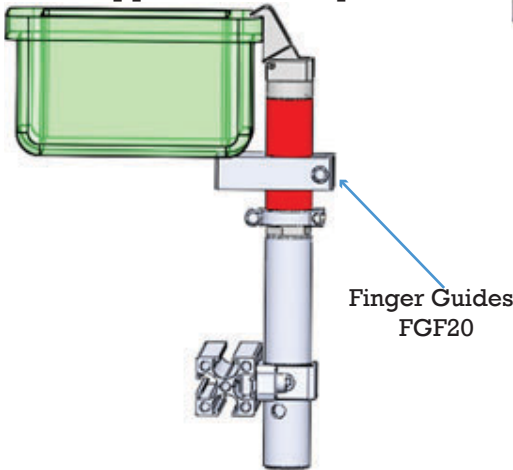

Finger Guides
FGF20

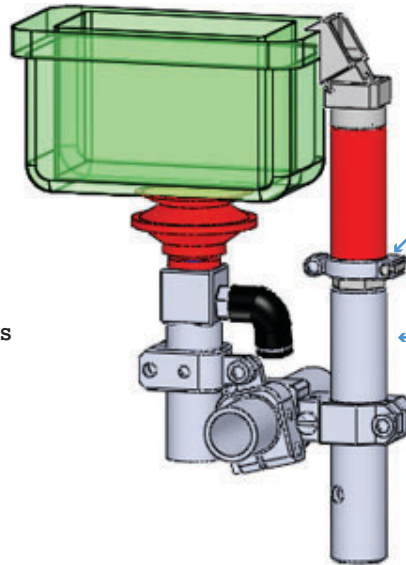


Finger Sensor Bracket
FSB-20

Sensor LM-9
(PNP or NPN)


Gripper Extension Tube
ET20L100

35 degree Finger Gripper

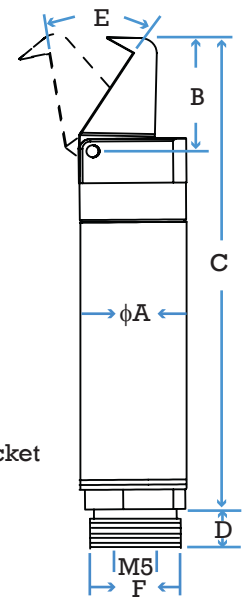

Part#	A	B	C	D	E	G	F	Wt.	Price
FG-1490	14	9	58	6	90°	4	M12x1	23g	\$145.08
FG-2090	20	14	88	8	90°	6	M17x1	60g	\$159.23

1. Features a magnetic piston
2. Use optional finger sensor bracket, LM-9 NPN or PNP sensor, finger guide, and gripper extension bracket
3. Maximum air pressure is 87 psi (6 bar)
4. Use dry and filtered air only
5. Ideally matching with FGS14/20 Finger Guide to gripping part edge

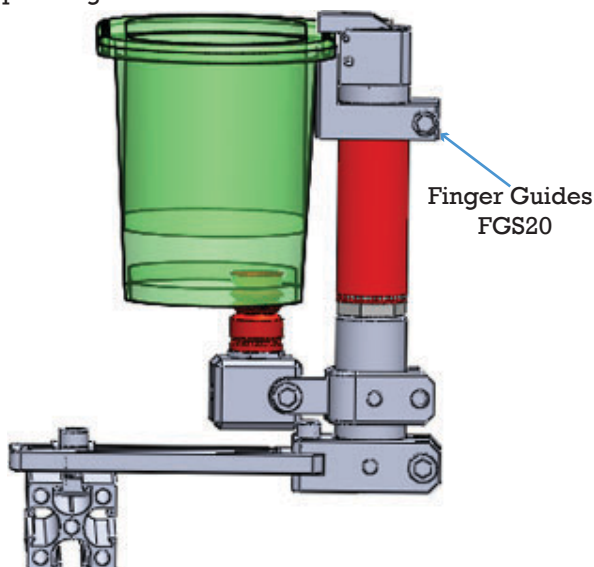

Finger Guides
FGS20



90 degree Finger Gripper

