




PART MOVER CONVEYOR

IDEAL FOR USE WITH ROBOT PART DROP OFF

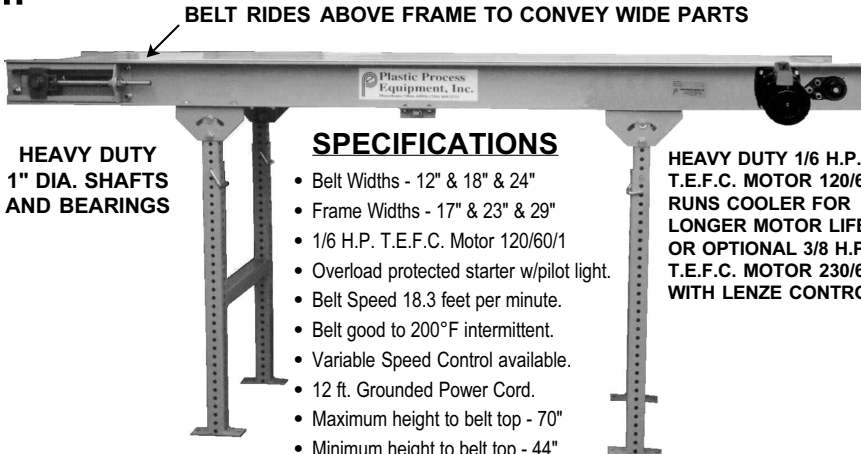


**HEAVY DUTY
1" DIA. SHAFTS
AND BEARINGS**

SPECIFICATIONS

- Belt Widths - 12" & 18" & 24"
- Frame Widths - 17" & 23" & 29"
- 1/6 H.P. T.E.F.C. Motor 120/60/1
- Overload protected starter w/pilot light.
- Belt Speed 18.3 feet per minute.
- Belt good to 200°F intermittent.
- Variable Speed Control available.
- 12 ft. Grounded Power Cord.
- Maximum height to belt top - 70"
- Minimum height to belt top - 44"
- Optional Programmable Control Available.

**HEAVY DUTY 1/6 H.P.
T.E.F.C. MOTOR 120/60/1
RUNS COOLER FOR
LONGER MOTOR LIFE
OR OPTIONAL 3/8 H.P.
T.E.F.C. MOTOR 230/60/3
WITH LENZE CONTROL.**

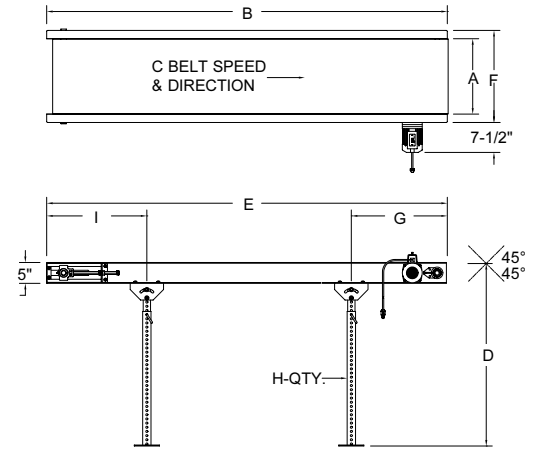

FEATURES

- VEE-Guide Belt Tracking System.
- Belt rides above frame surface to avoid part or box dragging on rails.
- Rugged 5" Aluminum Channel Frame.
- Easy adjustable stands, extra height for use with robot take-off or as parts mover table.
- Long Life 5" Dia. Aluminum Rollers grooved for VEE-Guide tracking system.
- HEAVY DUTY 1" Dia. Shafts and Bearings.
- Permanently lubricated bearings but we supply a zerk fitting for lubrication periodically in severe environments.
- Permanently lubricated drive chain.
- Better, more costly 2 ply monofilament smooth white belting and stainless steel lacing. This belt offers straight tracking and greater edgewear characteristics plus exceptional traverse (side to side) rigidity.
- Belt is FDA & USDA Approved.

— OPTIONAL PROGRAMMABLE CONTROL/MOTOR —

Fully programmable control system offers variable speed 0-30 feet per minute, indexing ability, photo-eye capable, reversible direction and can interface with an injection molding machine. Includes electronic motor overload protection, short, fault, plus over/under voltage protection. Requires 120/60/1 power supply. Control converts power supply to 230/60/3.



Includes 3/8 H.P. TEFC Motor 230/60/3, control converts 120/60/1 to 230/60/3.

PRICE . . \$550.00 - Add "LEN" to conveyor model number.

Model No.	A Belt Width In.	B Nominal Belt Length	C Belt Speed Ft./Min.	D Height to Top of Belt		E Overall Length In. Max.	F Frame Width In. Max.	G In.	H Qty. of Stands	I In.	Approx. Shipping Weight Lbs.	Prices
				Max.	Min.							
FT-126	12"	6'	18.3	70	44	72	17"	23"	1	-	270	\$1,907.00
FT-128	12"	8'	18.3	70	44	96	17"	23"	2	24	288	\$2,249.00
FT-1210	12"	10'	18.3	70	44	120	17"	23"	2	36	305	\$2,330.00
FT-1212	12"	12'	18.3	70	44	144	17"	23"	2	48	327	\$2,448.00
FT-186	18"	6'	18.3	70	44	72	23"	23"	1	-	281	\$2,060.00
FT-188	18"	8'	18.3	70	44	96	23"	23"	2	24	321	\$2,396.00
FT-1810	18"	10'	18.3	70	44	120	23"	23"	2	36	361	\$2,494.00
FT-1812	18"	12'	18.3	70	44	144	23"	23"	2	48	400	\$2,624.00
FT-246	24"	6'	18.3	70	44	72	29"	23"	1	-	345	\$2,411.00
FT-248	24"	8'	18.3	70	44	96	29"	23"	2	24	425	\$2,750.00
FT-2410	24"	10'	18.3	70	44	120	29"	23"	2	36	518	\$2,856.00
FT-2412	24"	12'	18.3	70	44	144	29"	23"	2	48	611	\$2,985.00

VARIABLE SPEED CONTROL, FACTORY INSTALLED ONLY, 0-54 FPM, SCR CONTROL, 1/4 H.P. D.C. MOTOR.

PRICE.....\$150.00 - Add "VS" to conveyor model number.



PLASTIC PROCESS EQUIPMENT, INC.

www.ppe.com • e-mail: sales@ppe.com

PPE WEST 6385 Montessouri Street, Las Vegas, Nevada 89113
702-433-6385 • 800-258-8877 • Fax: 702-433-6388

PPE SOUTH 11218 Challenger Avenue, Odessa, Florida 33556
727-834-8888 • 800-282-6783 • Fax: 727-834-8873

8303 CORPORATE PARK DRIVE, MACEDONIA (Cleveland), OHIO 44056, USA

Toll Free: USA, Canada & Mexico

PPE 216-367-7000 • Toll Free: 800-321-0562 • Fax: 216-367-7022 • Order Fax: 800-223-8305

800-362-0706