




STATIC NEUTRALIZING BARS FOR LOW PROFILE OR FLAT PARTS

-HOW TO USE-

PPE Static Neutralizing Bars are easy to use. Simply connect the power supply and filtered air to the bar and mount it above the parts to be neutralized. The Static Neutralizing Bar works best when it is mounted within 5" of the parts. *Perfect for conveyor mounting.* Requires a compressed air supply and power supply unit.


FEATURES:

- Rugged aluminum construction.
- No moving parts.
- Easy to use.
- Shock protection (Mechanical).
- Recommended air pressure 10 to 15 P.S.I. Not to exceed 40 P.S.I.
- Airboost for increased range
- 120/60/1, 0.3 Amps.
- 10 ft. Cable.

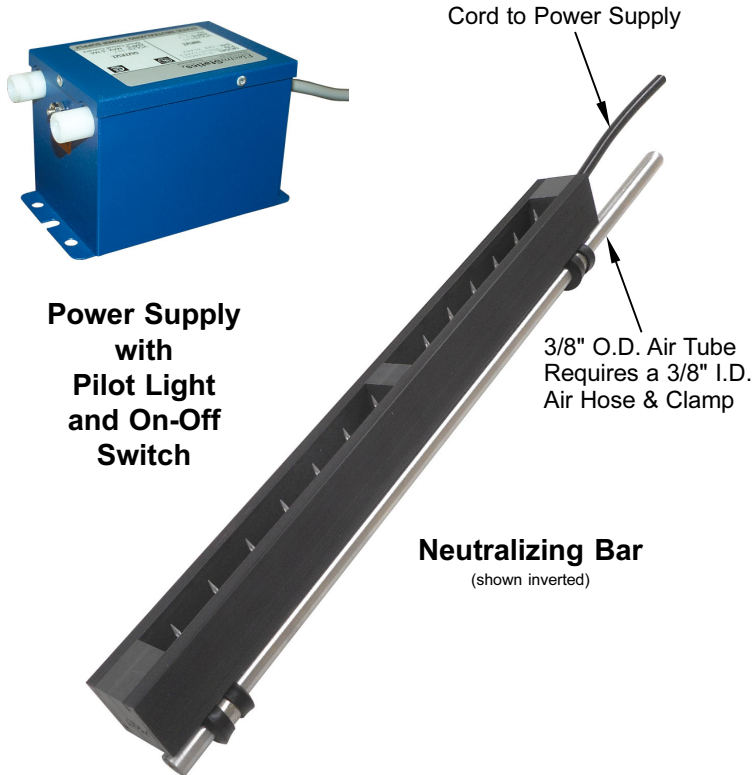

POWER SUPPLY:

All power supplies are self-regulating, automatically providing optimum performance for any combination of bars - to a total length up to 300". They are magnetically regulated, so neutralizing bars may be added without adjusting the power supply. For safety, they have flux leakage, which limits output current to 2.5 milliamps under short circuit conditions.

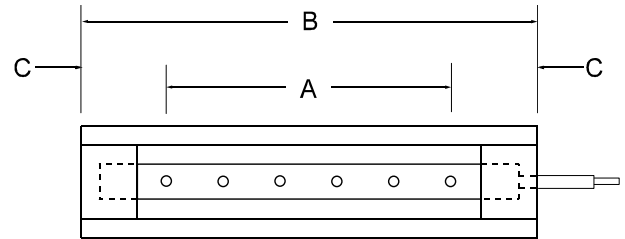

OVERALL LENGTH	DIMENSIONS (INCHES)			NEUTRALIZING BAR		POWER SUPPLY	
	A	B	C	PART NO.	PRICE	PART NO.	PRICE
6"	3"	6"	1-1/2"	91203-06	\$142.00	T1246	\$301.00
12"	9"	12"	1-1/2"	91203-12	\$142.00	T1246	\$301.00
18"	15"	18"	1-1/2"	91203-18	\$151.00	T1246	\$301.00
24"	21"	24"	1-1/2"	91203-24	\$176.00	T1246	\$301.00
36"	33"	36"	1-1/2"	91203-36	\$205.00	T1246	\$301.00

WARNING: Do Not operate powered equipment in explosive atmospheres (class 1, Group D atmospheres).



PLASTIC PROCESS EQUIPMENT, INC.

www.ppe.com • e-mail: sales@ppe.com

PPE WEST 6385 Montessouri Street, Las Vegas, Nevada 89113
702-433-6385 • 800-258-8877 • Fax: 702-433-6388

PPE SOUTH 11218 Challenger Avenue, Odessa, Florida 33556
727-834-8888 • 800-282-6783 • Fax: 727-834-8873

8303 CORPORATE PARK DRIVE, MACEDONIA (Cleveland), OHIO 44056, USA

216-367-7000 • Toll Free: 800-321-0562 • Fax: 216-367-7022 • Order Fax: 800-223-8305

Toll Free: USA, Canada & Mexico
800-362-0706