




MICRO-PNEUMATIC™ GATE CUTTER

Micro-Pneumatic™ Gate Cutter offers features not normally found in pneumatic cutters. Their physical dimensions are small for maximum maneuverability. Cutter heads have ultra slim profiles for maximum accessibility in high density areas.

Micro-Pneumatic™ Gate Cutter is light in weight (6 oz.) and substantially quieter than other pneumatic tools, two important factors in reducing operator fatigue. It can be quickly changed between left or right handed operation. In use, only slight pressure is required to move the actuator bar through its 1/8" stroke. The result is a tool that significantly reduces operator fatigue and fatigue related injuries and complaints.

-FEATURES-

- Slim profile
- Light weight - only 6 oz.
- Fast action
- Ultra quiet
- Requires only 50 P.S.I. air pressure max.
- For left or right handed operation
- 1/8" stroke actuator bar which reduces operator fatigue, injuries, and complaints.
- Features patented blade by-pass shear cutting action. Blades slightly overlap.
- Maximum Cutting Thickness: .050"

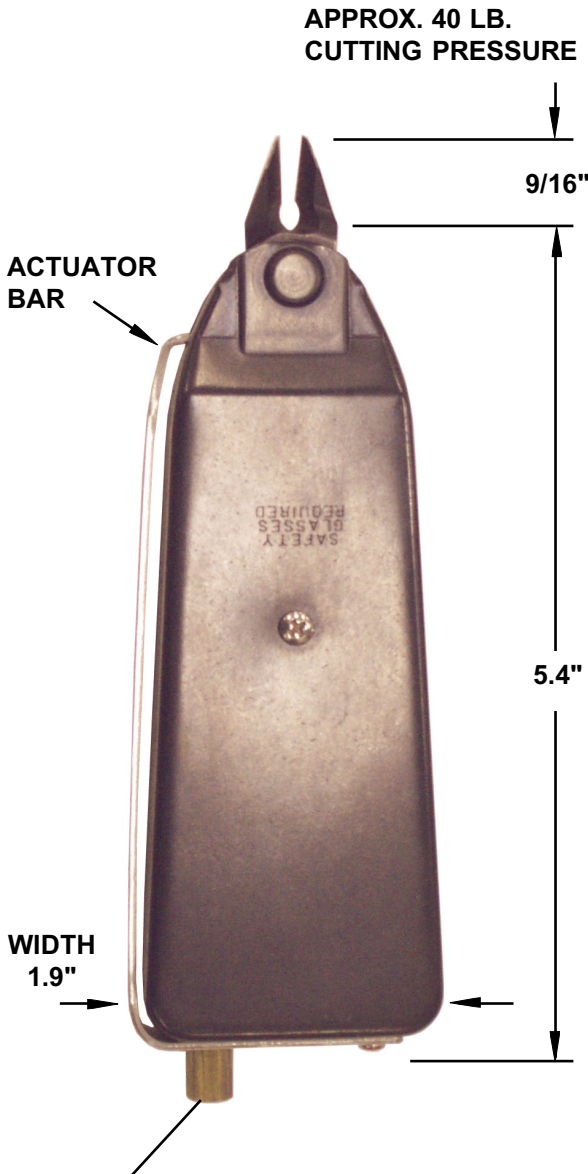

APPROX. BLADE OPENING
5/64" AT TIP
3/64" AT BASE

EFFECTIVE CUTTING EDGE
OF BLADES 3/8"

PRICES

MODEL 590 MICRO-PNEUMATIC GATE CUTTER

1 or more.....\$93.00 ea.
*comes with 6' of air hose

REPLACEMENT BLADES FOR 590 PART NO P40230

1 or more.....\$11.90 pr.

SPARE 6ft AIR HOSE w/FITTINGS PART NO P40040

1 or more.....\$14.50 ea.



INCLUDES 6' OF AIR HOSE WITH FITTINGS (1/8" NPT MALE)

NOTES: MAXIMUM OPERATING PRESSURE OF 50 PSI. INITIAL APPLICATION OF PRESSURE MAY CAUSE ACTIVATION OF TOOL.

DO NOT USE LUBRICATION IN VALVE OR AIR LINE



PLASTIC PROCESS EQUIPMENT, INC.

www.ppe.com • e-mail: sales@ppe.com

6385 Montessouri Street, Las Vegas, Nevada 89113
702-433-6385 • 800-258-8877 • Fax: 702-433-6388

11218 Challenger Avenue, Odessa, Florida 33556
727-834-8888 • 800-282-6783 • Fax: 727-834-8873

8303 CORPORATE PARK DRIVE, MACEDONIA (Cleveland), OHIO 44056, USA

Toll Free: USA, Canada & Mexico
800-362-0706

216-367-7000 • Toll Free: 800-321-0562 • Fax: 216-367-7022 • Order Fax: 800-223-8305