



# MASTER HEAT GUNS

## FOR FAST PORTABLE FLAMELESS HEAT

### - USES -

- CLEANING NOZZLES, SCREW TIPS, BARRELS AND SCREWS.
- HEATING NOZZLES AND SCREW TIPS BEFORE REMOVAL.
- REMOVING PLASTIC FROM HEATER BANDS AND OTHER PARTS.
- APPLYING FORM-FIT AND SHRINK TUBING.
- SOFTEN, MOLD, BEND AND FORM PLASTICS.
- BONDING VINYLs AND WELDING OTHER PLASTICS FAST.

### ALL MODELS


- Avg. air velocity - 3,000 FPM at ambient temp.
- Avg. air volume, shutter open - 23 CFM at ambient temp.
- Overall dimensions - 8"L x 5-1/4"W x 9-1/2"H. 1-3/16" dia nozzle.
- Shipping weight 5 lbs.
- Net weight 3-1/2 lbs.

500-700°F MODEL HG-501A  
705-1000°F MODEL HG-501D

## MASTER Quality Construction Means Rugged Reliability

The Master Heat Gun is the result of more than 50 years leadership in building rugged, reliable heat guns. It is engineered to deliver the temperatures and air volume required for the most demanding jobs in factories, laboratories and workshops. Every component is designed to meet the exacting demands of heavy duty industrial use. Check the quality features below, and see for yourself why the Master Heat Gun is the overwhelming industry choice in portable, flameless heat tools.

- |   |   |   |  |
|---|---|---|--|
| <p>1. Double-jacketed heater housing protects heating element from damage.</p> <p>2. Reinforced, mica-insulated ceramic heating element withstands hard use.</p> <p>3. Sturdy die-cast aluminum housing is rugged and light weight. Protects motor assembly from hard knocks.</p> | <p>4. Adjustable air intake controls air volume and temperature range.</p> <p>5. Powerful high speed universal motor. Production-line quality for high volume heat, hour after hour.</p> <p>6. Externally accessible brush holders permit changing brushes without disassembly of unit.</p> | <p>7. Three-position "off-on-hot" finger-tip rocker switch is easy to use.</p> <p>8. Non-slip rubber-backed base permits full 90° rotation of heat gun for use in any position on workbench or assembly line.</p> | <p>9. Comfortable contoured handle combined with overall balance of unit gives operator secure grip and firm control of gun.</p> <p>10. Heavy duty, all resistant neoprene 3-wire cordset features a molded-on grounded 3-prong plug</p> |
|---|---|---|--|

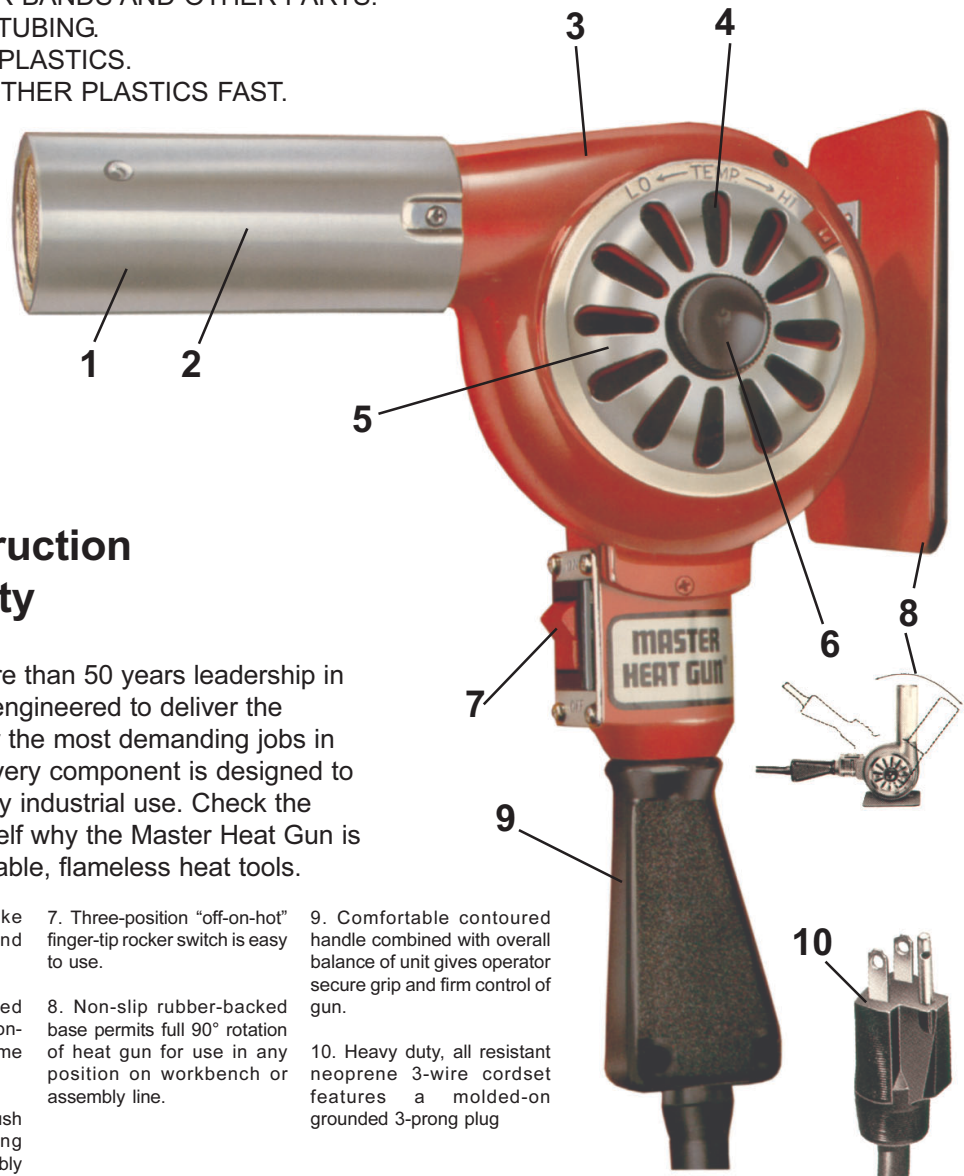

PART NO.	DESCRIPTION	PRICE
HG-501A	HEAT GUN, 120 VOLTS, 14 AMPS, 500-700°F TEMPERATURE RANGE	\$122.90
HG-501D	HEAT GUN, 120 VOLTS, 18 AMPS, 750-1000°F TEMPERATURE RANGE	\$122.90
HAS-011K	SPARE HEATING ELEMENT FOR HG-501A	\$22.50
HAS-043K	SPARE HEATING ELEMENT FOR HG-751B & HG-501D	\$22.50
A-160-HG	SHRINK TUBING ATTACHMENT FOR TUBING UP TO 3/4" O.D.	\$12.25
A-170-HG	SHRINK TUBING ATTACHMENT FOR TUBING FROM 3/4" O.D. TO 2" O.D.	\$15.50
51309	1/4" PINPOINT ATTACHMENT	\$17.90
51013	PLASTIC MOLDED CARRYING & STORAGE CASE	\$30.70
BRU-089K	BRUSH KIT: INCLUDES BRUSHES, CAPS & SPRINGS	\$8.70/kit



## PLASTIC PROCESS EQUIPMENT, INC.

6385 Montessouri Street, Las Vegas, Nevada 89113  
PPE WEST 702-433-6385 • 800-258-8877 • Fax: 702-433-6388

11218 Challenger Avenue, Odessa, Florida 33556  
PPE SOUTH 727-834-8888 • 800-282-6783 • Fax: 727-834-8873

8303 CORPORATE PARK DRIVE, MACEDONIA (Cleveland), OHIO 44056, USA

216-367-7000 • Toll Free: 800-321-0562 • Fax: 216-367-7022 • Order Fax: 800-223-8305

www.ppe.com • e-mail: sales@ppe.com

Toll Free: USA, Canada & Mexico  
**800-362-0706**