



# NEOPRENE DRYER HOSE

FOR  
LOW-TEMP. AIR

SINGLE PLY - RATED 350°F (300°F CONTINUOUS)


**ISO-9001**

MANUFACTURED IN A  
QUALITY SYSTEM CERTIFIED  
FACILITY.

HOSE I.D.	WORKING PRESSURE	MIN. BEND RADIUS	MAX. NEG. WORKING PRESSURE	PART NUMBER	PRICING PER 12 FT. LENGTH	
					1-2	3+
1-1/4"	26	1.25"	24	LT-1X114	\$33.20	\$31.30
1-1/2"	25	1.50"	22	LT-1X112	38.05	35.80
1-3/4"	24	1.75"	21	LT-1X134	28.35	26.70
2"	23	2.00"	20	LT-1	31.85	30.00
2-1/4"	20	2.25"	18	LT-1X214	34.05	32.10
2-1/2"	21	2.50"	17	LT-1X212	37.55	35.40
3"	19	3.00"	16	LT-1X3	39.95	37.70
3-1/2"	17.5	3.50"	14.5	LT-1X312	48.40	45.65
4"	16	4.00"	13	LT-1X4	49.15	46.35
5"	14	5.00"	10	LT-1X5	56.25	53.05
6"	11	6.00"	7	LT-1X6	65.70	61.95
8"	7	8.00"	3	LT-1X8	93.65	88.30

Ideal for handling hot or cold air ventilation or fume removal from enclosures etc., etc.

- 12 ft. Stock length
- Single or double ply
- Reinforced w/spring steel wire helix
- Black in color
- For use on return of low-temp air
- Non kinking
- Bend radius is equal to diameter
- Tolerance on length  $\pm 1/4$ "/ft.
- Other sizes available

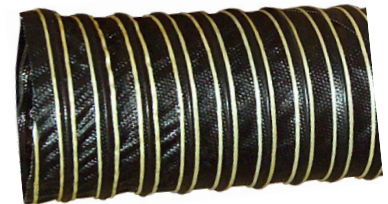

- Neoprene Hose Chemical Resistance:  
Oil & Solvents - Fair  
Acid, Alkali, H<sub>2</sub>O, Fungus - Excellent  
Ozone & Weather - Good

DOUBLE PLY - RATED 375°F (325°F CONTINUOUS)

HOSE I.D.	WORKING PRESSURE	MIN. BEND RADIUS	MAX. NEG. WORKING PRESSURE	PART NUMBER	PRICING PER 12 FT. LENGTH	
					1-2	3+
1-1/4"	26	1.25"	24	LT-15X114	\$36.00	\$33.95
1-1/2"	25	1.50"	22	LT-15X112	37.20	35.05
1-3/4"	24	1.75"	21	LT-15X134	39.55	37.30
2"	23	2.00"	20	LT-15	40.65	38.35
2-1/4"	20	2.25"	18	LT-15X214	46.30	43.65
2-1/2"	21	2.50"	17	LT-15X212	48.70	45.95
3"	19	3.00"	16	LT-15X3	54.00	50.90
3-1/2"	17.5	3.50"	14.5	LT-15X312	60.35	56.90
4"	16	4.00"	13	LT-15X4	63.80	60.15
5"	14	5.00"	10	LT-15X5	77.05	72.65
6"	11	6.00"	7	LT-15X6	88.65	83.55
8"	7	8.00"	3	LT-15X8	122.60	115.60

NOTE: For longer extensions, join two lengths together by threading one piece inside the other.



# SILICONE DRYER HOSE

FOR  
HIGH-TEMP. AIR

SINGLE PLY - RATED 550°F (500°F CONTINUOUS)

**ISO-9001**


MANUFACTURED IN A  
QUALITY SYSTEM CERTIFIED  
FACILITY.

HOSE I.D.	WORKING PRESSURE	MIN. BEND RADIUS	MAX. NEG. WORKING PRESSURE	PART NUMBER	PRICING PER 12 FT. LENGTH	
					1-2	3+
1-1/4"	26	1.25"	24	HT-1X114	\$40.50	\$38.15
1-1/2"	25	1.50"	22	HT-1X112	42.80	40.35
1-3/4"	24	1.75"	21	HT-1X134	43.55	41.10
2"	23	2.00"	20	HT-1	45.50	42.85
2-1/4"	20	2.25"	18	HT-1X214	48.55	45.65
2-1/2"	21	2.50"	17	HT-1X212	50.20	47.30
3"	19	3.00"	16	HT-1X3	57.75	54.40
3-1/2"	17.5	3.50"	14.5	HT-1X312	65.85	62.05
4"	16	4.00"	13	HT-1X4	71.05	66.95
5"	14	5.00"	10	HT-1X5	83.50	78.65
6"	11	6.00"	7	HT-1X6	96.85	91.25
8"	7	8.00"	3	HT-1X8	138.05	130.05

- 12 ft. Stock length
- Single or double ply
- Reinforced w/spring steel wire helix
- Silicone coated fiberglass
- Orange in color
- Non kinking
- Bend radius is equal to diameter
- Tolerance on length  $\pm 1/4$ "/ft.
- Other sizes available

- Silicone Hose Chemical Resistance:  
Oil & Solvents - Fair  
Acid, Alkali, H<sub>2</sub>O, Fungus - Excellent  
Ozone & Weather - Excellent

Photo shows new bridge type hose clamp that fits over wire helix to provide a secure positive seal.



- All stainless steel
- Two sizes

### BRIDGE TYPE CLAMPS

PART NO.	O.D. FITS SIZE	PRICES
BSS134	1-3/4" to 3"	\$ 3.40 ea.
BSS400	4" to 6"	\$ 4.20 ea.

DOUBLE PLY - RATED 600°F (550°F CONTINUOUS)

HOSE I.D.	WORKING PRESSURE	MIN. BEND RADIUS	MAX. NEG. WORKING PRESSURE	PART NUMBER	PRICING PER 12 FT. LENGTH	
					1-2	3+
1-1/4"	26	1.25"	24	HT-15X114	\$55.00	\$52.25
1-1/2"	25	1.50"	22	HT-15X112	56.45	53.60
1-3/4"	24	1.75"	21	HT-15X134	60.90	57.85
2"	23	2.00"	20	HT-15	65.50	62.15
2-1/4"	20	2.25"	18	HT-15X214	76.30	72.55
2-1/2"	21	2.50"	17	HT-15X212	78.45	74.55
3"	19	3.00"	16	HT-15X3	90.20	85.75
3-1/2"	17.5	3.50"	14.5	HT-15X312	109.30	103.85
4"	16	4.00"	13	HT-15X4	111.90	106.35
5"	14	5.00"	10	HT-15X5	131.45	124.90
6"	11	6.00"	7	HT-15X6	153.70	146.05
8"	7	8.00"	3	HT-15X8	214.10	203.50