



SLIDE RETAINER CUMSA

SIMPLE COST EFFECTIVE DESIGN


FEATURES

- Less machining required for installation compared to competitive products.
- Minimum space required for installation.
- Socket head cap screw & dowel pin included.
- Material: 1.8159 Alloy Steel
Hardness: 45 ± 3 Rc.
- Patented System

ISO-9001
MANUFACTURED IN A
QUALITY SYSTEM CERTIFIED
FACILITY.




Part No.	Price
RC123006	\$32.80
RC164008	42.60
RC205010	48.15
RC246012	57.50
RC328012	75.40
RC328016	83.00

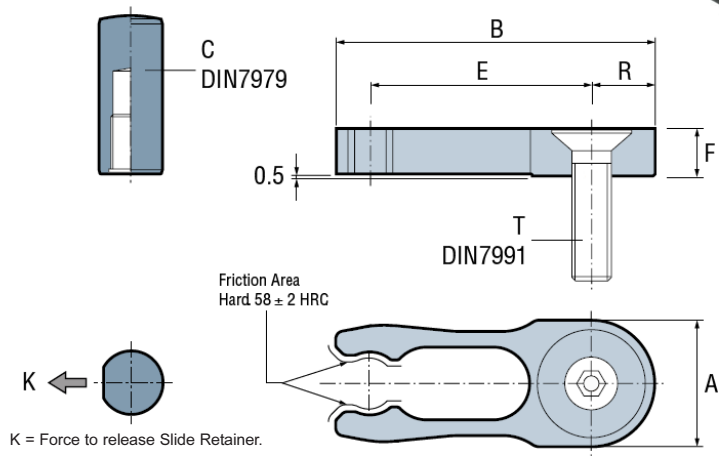

DIMENSIONS (shown in mm)

Part No.	A	B	C	E	F	G	H	K	R	T
RC123006	12	30	6x20	21	5	4	16	5 Kg.	6	M5x16
RC164008	16	40	8x20	28	6	5	15	7 Kg.	8	M6x25
RC205010	20	50	10x24	34	8	6	17	14 Kg.	10	M8x30
RC246012	24	60	12x32	42	10	7	23	21 Kg.	12	M10x40
RC328012	32	80	16x40	56	12	9	27	28 Kg.	16	M12x50
RC328016	32	80	16x40	56	16	9	25	38 Kg.	16	M12x50

TYPICAL INSTALLATION

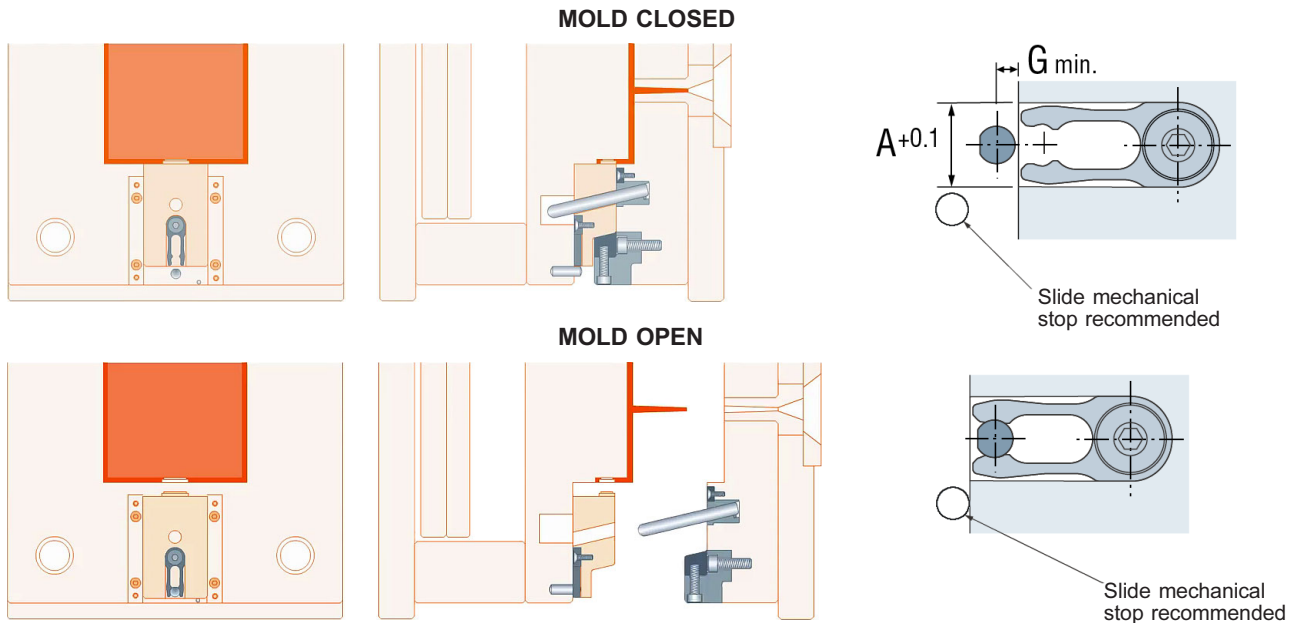

PLASTIC PROCESS EQUIPMENT, INC. www.ppe.com • e-mail: sales@ppe.com

PPE WEST 6385 Montessouri Street, Las Vegas, Nevada 89113 **PPE SOUTH** 11218 Challenger Avenue, Odessa, Florida 33556

702-433-6385 • 800-258-8877 • Fax: 702-433-6388 727-834-8888 • 800-282-6783 • Fax: 727-834-8873

8303 CORPORATE PARK DRIVE, MACEDONIA (Cleveland), OHIO 44056, USA

Toll Free: USA, Canada & Mexico
800-362-0706

216-367-7000 • Toll Free: 800-321-0562 • Fax: 216-367-7022 • Order Fax: 800-223-8305