



# NEOPRENE DRYER HOSE

FOR  
LOW-TEMP. AIR

SINGLE PLY - RATED 350°F (300°F CONTINUOUS)


**ISO-9001**

MANUFACTURED IN A  
QUALITY SYSTEM CERTIFIED  
FACILITY.

HOSE I.D.	WORKING PRESSURE PSI	MIN. BEND RADIUS	NEGATIVE PRESSURE Hg	PART NO.	PRICING PER 12 FT. LENGTH	
					1-2	3+
1-1/4"	26	1.25"	24	LT-1X114	\$36.25	\$34.15
1-1/2"	25	1.50"	22	LT-1X112	\$41.50	\$39.10
1-3/4"	24	1.75"	21	LT-1X134	\$30.95	\$29.15
2"	23	2.00"	20	LT-1	\$34.80	\$32.75
2-1/4"	20	2.25"	18	LT-1X214	\$37.20	\$35.05
2-1/2"	21	2.50"	17	LT-1X212	\$41.00	\$38.65
3"	19	3.00"	16	LT-1X3	\$43.65	\$41.15
3-1/2"	17.5	3.50"	14.5	LT-1X312	\$52.85	\$49.85
4"	16	4.00"	13	LT-1X4	\$53.70	\$50.60
5"	14	5.00"	10	LT-1X5	\$61.40	\$57.90
6"	11	6.00"	7	LT-1X6	\$71.70	\$67.60
8"	7	8.00"	3	LT-1X8	102.25	\$96.40

Ideal for handling hot or cold air ventilation or fume removal from enclosures etc., etc.

- 12 ft. Stock length
- Single or double ply
- Reinforced w/spring steel wire helix
- Black in color
- For use on return of low-temp air
- Non kinking
- Bend radius is equal to diameter
- Tolerance on length  $\pm 1/4$ "/ft.
- Other sizes available

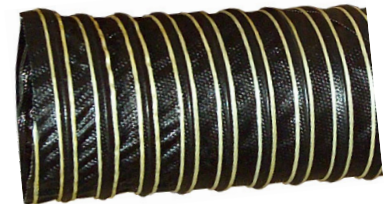

- Neoprene Hose Chemical Resistance:  
Oil & Solvents - Fair  
Acid, Alkali, H<sub>2</sub>O, Fungus - Excellent  
Ozone & Weather - Good

DOUBLE PLY - RATED 375°F (325°F CONTINUOUS)

HOSE I.D.	WORKING PRESSURE PSI	MIN. BEND RADIUS	NEGATIVE PRESSURE Hg	PART NO.	PRICING PER 12 FT. LENGTH	
					1-2	3+
1-1/4"	26	1.25"	24	LT-15X114	\$39.30	\$37.05
1-1/2"	25	1.50"	22	LT-15X112	\$40.60	\$38.25
1-3/4"	24	1.75"	21	LT-15X134	\$43.20	\$40.75
2"	23	2.00"	20	LT-15	\$44.40	\$41.85
2-1/4"	20	2.25"	18	LT-15X214	\$50.55	\$47.65
2-1/2"	21	2.50"	17	LT-15X212	\$53.20	\$50.15
3"	19	3.00"	16	LT-15X3	\$58.95	\$55.55
3-1/2"	17.5	3.50"	14.5	LT-15X312	\$65.85	\$62.10
4"	16	4.00"	13	LT-15X4	\$69.65	\$65.70
5"	14	5.00"	10	LT-15X5	\$84.15	\$79.35
6"	11	6.00"	7	LT-15X6	\$96.75	\$91.25
8"	7	8.00"	3	LT-15X8	134.60	126.90

NOTE: For longer extensions, join two lengths together by threading one piece inside the other.



# SILICONE DRYER HOSE

FOR  
HIGH-TEMP. AIR

SINGLE PLY - RATED 550°F (500°F CONTINUOUS)

**ISO-9001**

MANUFACTURED IN A  
QUALITY SYSTEM CERTIFIED  
FACILITY.

HOSE I.D.	WORKING PRESSURE PSI	MIN. BEND RADIUS	NEGATIVE PRESSURE Hg	PART NO.	PRICING PER 12 FT. LENGTH	
					1-2	3+
1-1/4"	26	1.25"	24	HT-1X114	\$44.20	\$41.65
1-1/2"	25	1.50"	22	HT-1X112	\$46.70	\$44.05
1-3/4"	24	1.75"	21	HT-1X134	\$47.55	\$44.85
2"	23	2.00"	20	HT-1	\$49.65	\$46.75
2-1/4"	20	2.25"	18	HT-1X214	\$53.00	\$49.85
2-1/2"	21	2.50"	17	HT-1X212	\$54.80	\$51.65
3"	19	3.00"	16	HT-1X3	\$63.00	\$59.35
3-1/2"	17.5	3.50"	14.5	HT-1X312	\$71.90	\$67.75
4"	16	4.00"	13	HT-1X4	\$77.60	\$73.10
5"	14	5.00"	10	HT-1X5	\$91.15	\$85.90
6"	11	6.00"	7	HT-1X6	105.75	\$99.60
8"	7	8.00"	3	HT-1X8	150.75	142.00

- 12 ft. Stock length
- Single or double ply
- Reinforced w/spring steel wire helix
- Silicone coated fiberglass
- Orange in color
- Non kinking
- Bend radius is equal to diameter
- Tolerance on length  $\pm 1/4$ "/ft.
- Other sizes available

- Silicone Hose Chemical Resistance:  
Oil & Solvents - Fair  
Acid, Alkali, H<sub>2</sub>O, Fungus - Excellent  
Ozone & Weather - Excellent

Photo shows new bridge type hose clamp that fits over wire helix to provide a secure positive seal.



- All stainless steel
- Two sizes

### BRIDGE TYPE CLAMPS

PART NO.	O.D. FITS SIZE	PRICES
BSS134	1-3/4" to 3"	\$ 3.70 ea.
BSS400	4" to 6"	\$ 4.60 ea.

DOUBLE PLY - RATED 600°F (550°F CONTINUOUS)

HOSE I.D.	WORKING PRESSURE PSI	MIN. BEND RADIUS	NEGATIVE PRESSURE Hg	PART NO.	PRICING PER 12 FT. LENGTH	
					1-2	3+
1-1/4"	26	1.25"	24	HT-15X114	\$60.05	\$57.05
1-1/2"	25	1.50"	22	HT-15X112	\$61.60	\$58.50
1-3/4"	24	1.75"	21	HT-15X134	\$66.50	\$63.15
2"	23	2.00"	20	HT-15	\$71.50	\$67.85
2-1/4"	20	2.25"	18	HT-15X214	\$83.30	\$79.20
2-1/2"	21	2.50"	17	HT-15X212	\$85.60	\$81.35
3"	19	3.00"	16	HT-15X3	\$98.50	\$93.60
3-1/2"	17.5	3.50"	14.5	HT-15X312	119.30	113.40
4"	16	4.00"	13	HT-15X4	122.15	116.10
5"	14	5.00"	10	HT-15X5	143.50	136.40
6"	11	6.00"	7	HT-15X6	167.80	159.50
8"	7	8.00"	3	HT-15X8	233.75	222.15