




# MINI BRASS BALL VALVES

## CHROME PLATED

**ISO-9002**  
 MANUFACTURED IN A  
 QUALITY SYSTEM CERTIFIED  
 FACILITY.

PPE industrial quality, one piece brass bar stock design Mini Brass Ball Valves provide the space savings necessary for small line fluid control applications. Designed for handling compressed air, water, fuels, gases, and other non-corrosive liquids in industrial applications that require compact ball valves. Top-of-the-line features include 235psi MWP Rating, PTFE ball seats for a positive seal in both directions, Viton stem seal, chrome plated brass ball and body for long life and extra corrosion resistance, bottom loaded stem for safety. Corrosion resistant nylon wing handle is compact, easy to use, and clearly shows ball position. Each valve is leak tested to ensure quality. Valve body functions as wrench flats for easy installation.

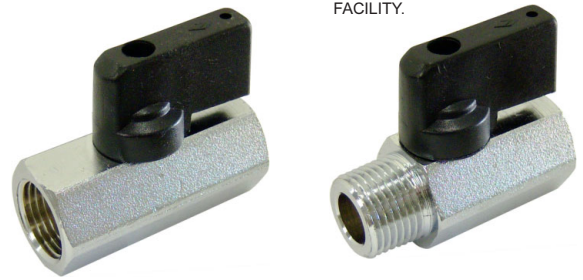

**FEMALE X FEMALE**

**MALE X FEMALE**

### FEMALE X FEMALE

Part No.	Thread Size N.P.T.	QUANTITY PRICES	
		1-9	10+
FMV-0018	1/8"	\$5.31	\$5.03
FMV-0014	1/4"	\$5.75	\$5.46
FMV-0038	3/8"	\$5.75	\$5.46
FMV-0012	1/2"	\$5.98	\$5.68

### MALE X FEMALE

MMV-0218	1/8"	\$4.87	\$4.63
MMV-0214	1/4"	\$6.06	\$5.77
MMV-0238	3/8"	\$6.04	\$5.75
MMV-0212	1/2"	\$7.07	\$6.72

- Temp Range: 32°F to 176°F
- Threads: Full N.P.T. made to ANSI standards B1.20.1
- Porting: Full on 1/8" & 1/4" sizes  
Standard on 3/8" & 1/2" sizes
- Ball Seats: PTFE
- Body: Chrome plated brass hex, one piece forged
- Ball: Chrome plated brass
- Blowout-proof brass stem.
- Stem Seal: Viton
- MWP Rating: 235psi, will handle 300psi @ 75°F
- Handle: Nylon - corrosion resistant
- Each valve is seal tested for safety.
- Double seal system for operation in both directions.
- 1/4 turn handle with mechanical stop.



# BRASS MINI-BALL VALVES

## WITH STANDARD BARBED INSERT

- Temp Range: 14°F to 212°F
- Threads: 1/8" & 1/4" N.P.T.
- 180° Operational 1/4 turn handle with mechanical stop.
- Standard Porting.

- Double seal system for operation in both directions.
- Blowout-proof brass stem.
- 200 WOG rating.
- 125 WSP rating.

- Body: Forged Brass
- Ball: Chrome plated brass
- Ball Seats: PTFE
- Handle: Steel with PVC cover.
- O-Ring: NBR



**ISO-9002**  
 MANUFACTURED IN A  
 QUALITY SYSTEM CERTIFIED  
 FACILITY.



**GREAT QUALITY!  
 GREAT PRICE!**



### MALE X HOSE BARB

PART NO.	THREAD SIZE	HOSE I.D.	PRICES	
			1-9	10+
944-138	1/4" NPT	1/4"	\$3.06	\$2.92
944-128	1/4" NPT	3/8"	\$3.12	\$2.96

### HOSE BARB X HOSE BARB

PART NO.	BARB HOSE I.D.	PRICES	
		1-9	10+
944-142	1/4" 1/4"	\$2.68	\$2.54
944-134	3/8" 3/8"	\$3.10	\$2.96

### FEMALE X HOSE BARB

PART NO.	THREAD SIZE	HOSE I.D.	PRICES	
			1-9	10+
944-135	1/8" NPT	1/8"	\$3.65	\$3.50
944-121	1/4" NPT	5/16"	\$3.11	\$2.96
944-136	1/4" NPT	1/4"	\$2.58	\$2.45



## PLASTIC PROCESS EQUIPMENT, INC.

**EAST** 8303 CORPORATE PARK DRIVE  
 MACEDONIA, OHIO 44056  
 216-367-7000 • FAX: 216-367-7022  
 TOLL FREE: 800-321-0562

**WEST** 6385 MONTESSOURI STREET  
 LAS VEGAS, NEVADA 89113  
 702-433-6385 • FAX: 702-433-6388  
 TOLL FREE: 800-258-8877

**www.ppe.com**  
 e-mail: sales@ppe.com

**Toll Free: USA, Canada & Mexico**  
**800-362-0706**

Order Fax: 800-223-8305