



EAGLE SIGNAL 1/16 DIN TIMERS

MULTI-FUNCTION DIAL SET TIMER

B866-500

PRICE \$173.00




NOTE: Mounting Bracket Included.

11 Pin Screw-Down Type Socket
Part No. TP311SB \$6.00

FEATURES

- NEMA 4X/IP65 rated front panel.
- Field selectable for operation in On-Delay, Off-Delay, Interval, or Repeat Cycle modes.
- Universal power supply accepts 100 - 240 VAC or 24 - 240 VDC.
- Meets IEC 801 level 4 noise immunity standards.
- Unique On-Delay/Interval model lets one unit do the work of two in many applications.
- Industry standard 11 pin socket connection.
- Front panel or DIN rail mounting.
- Flexible start and reset input signals.

DIMENSIONS

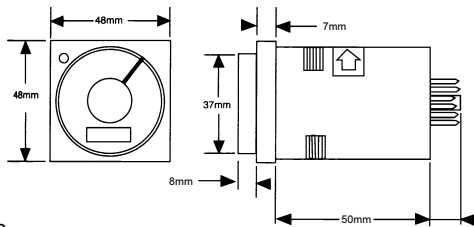

SPECIFICATIONS

(visit www.ppe.com for additional information)

Supply Voltage: 100 - 240 VAC 50/60Hz, and 24 - 240 VDC

Power Consumption: < 10 VA

Time Ranges: 16 ranges field selectable from 0.5 sec to 10 hrs

Operating Modes: On-Delay, Off-Delay, Interval, Repeat Cycle

Setting Accuracy: ± 5%

Repeat Accuracy: ± 0.5%

Electrical Service Life: 100,000 cycles at full load

Mechanical Service Life: 10 million cycles at minimum load


Temperature Range: 32° to 131°F (0° to 55°C)

Approximate Weight: 100 grams (3.5 oz.)

ISO 9001
MANUFACTURED IN A QUALITY SYSTEM CERTIFIED FACILITY.

RECOGNIZED RECOGNIZED CE

B866-500 Wiring Diagram



MULTI-FUNCTION LCD TIMER

B856-500

PRICE \$183.00




NOTE: Mounting Bracket Included.

11 Pin Screw-Down Type Socket
Part No. TP311SB \$6.00

FEATURES

- IEC IP65 rated front panel for use in washdown environments.
- Button-per-digit preset entry simplifies setup and operation.
- High Contrast dual line LCD display indicates both Process Time and Preset Value.
- Field selectable for operation in On-Delay, Off-Delay, Interval 1, Interval 2 or Repeat Cycle modes.
- Universal power supply accepts 24-240 VAC or 24 VDC.
- Meets IEC 801 level 4 noise immunity standards.
- Unique On-Delay/Interval mode lets one unit do the work of two in many applications.
- Industry standard 11 pin socket connection.
- Programmable security levels prevent unauthorized setpoint or program changes.

DIMENSIONS

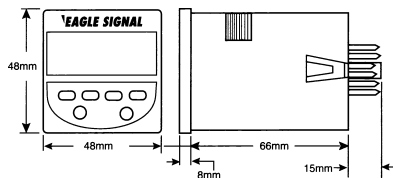

SPECIFICATIONS

(visit www.ppe.com for additional information)

Supply Voltage: 24 - 240 VAC 50/60Hz, and 24 VDC

Power Consumption: < 50 VA @ 240 VAC

Time Ranges: Field Selectable for Hours, Minutes, Seconds, Hours: Minutes, Minutes: Seconds

Resolution: Field selectable from XXXX to XX.XX for Hours, Minutes and Seconds

Operating Modes: On-Delay, Off-Delay, Interval 1, Interval 2, Repeat, On-Delay/Interval

Repeat Accuracy: ± 0.03%

Electrical Service Life: 100,000 cycles at full load

Mechanical Service Life: 10 million cycles at minimum load


Temperature Range: 32° to 140°F (0° to 60°C)

Approximate Weight: 3.5 oz.

ISO 9001
MANUFACTURED IN A QUALITY SYSTEM CERTIFIED FACILITY.

RECOGNIZED RECOGNIZED CE

B856-500 Wiring Diagram



MULTI-FUNCTION LED TIMER

B506-5001

PRICE \$202.00




NOTE: Mounting Bracket Included.

11 Pin Screw-Down Type Socket
Part No. TP311SB \$6.00

FEATURES

- IEC IP65 rated front panel for use in washdown environments.
- Four digit dual line LED display indicates set value and time value.
- Programmable security levels prevent unauthorized setpoint or program changes.
- Universal power supply accepts 90 - 240 VAC.
- Front panel programming with an intuitive button-per-digit interface.
- 5 amp relay output.
- Industry standard 11 pin socket connection.

DIMENSIONS

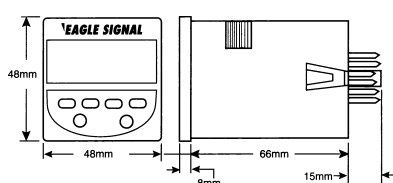

SPECIFICATIONS

(visit www.ppe.com for additional information)

Supply Voltage: 90 - 240 VAC 50/60Hz

Power Consumption: < 10 VA

Time Ranges: Field Selectable for Hours, Minutes, Seconds, Hours: Minutes, Minutes: Seconds

Resolution: Field selectable from XXXX to XX.XX for Hours, Minutes and Seconds

Operating Modes: On-Delay, Off-Delay, Interval, Repeat

Repeat Accuracy: ± 0.01%


Temperature Range: 32° to 131°F (0° to 55°C)

Approximate Weight: 3.5 oz.

ISO 9001
MANUFACTURED IN A QUALITY SYSTEM CERTIFIED FACILITY.

RECOGNIZED RECOGNIZED CE

B506-5001 Wiring Diagram



PLASTIC PROCESS EQUIPMENT, INC.

PPE WEST 6385 Montessouri Street, Las Vegas, Nevada 89113
702-433-6385 • 800-258-8877 • Fax: 702-433-6388

PPE SOUTH 11218 Challenger Avenue, Odessa, Florida 33556
727-834-8888 • 800-282-6783 • Fax: 727-834-8873

8303 CORPORATE PARK DRIVE, MACEDONIA (Cleveland), OHIO 44056, USA

www.ppe.com • e-mail: sales@ppe.com

216-367-7000 • Toll Free: 800-321-0562 • Fax: 216-367-7022 • Order Fax: 800-223-8305

Toll Free: USA, Canada & Mexico
800-362-0706