



DIGITAL MULTIMETERS

NEW MODEL!



POCKET MULTIMETER

CLAMP-ON MULTIMETER


MODEL DE-10

Digital Pocket Multimeter

The best little pocket tester we've used, AND at a GREAT PRICE!

Features

- Pocket size DMM.
- 1/2" LCD Display.
- Auto/Manual Range.
- Max Hold.
- Data Hold.
- Range Hold.
- 600V max.
- 5 DC Volt Ranges.
- 4 AC Volt Ranges.
- 6 Resistance Ranges.
- Audible Continuity Test.
- Audible Diode Test.
- Automatic Power-off.

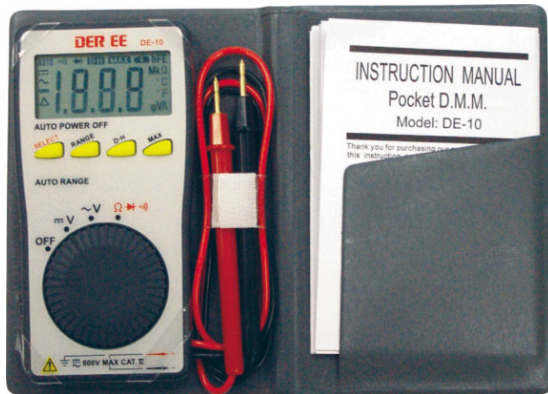

DE-10 General Specifications

Measurement Functions: DCV, ACV, ohms, diode, continuity.

Display: LCD: 1/2" High Digits (1999)

Neg Polarity Indicator

Low Battery warning.

Sampling Rate: approx 3 times/second.

Operating Temp: 0°-50°C (14°F-140°F).

Battery Life: approx 200 hours at DCV.

Safety Standard: 600V Cat II, 300V Cat III.

Dimensions: 4-1/4"(L) x 2-1/8"(W) x 7/16"(H)

108mm (L) x 55mm (W) x 11mm (H)

Weight: 50g

Battery: 3V Lithium PPE #CR2032 (Included)

Model DE-10

Part No.	Description	Price
DE-10	Pocket Multimeter	\$32.50

Spare battery available.

MODEL CM400

Compact Digital Clamp-On Multimeter

True RMS* Meter!

Features

- 3 3/4 LCD with max. reading of 4000
- CAT III 600V
- AC Current Measurement to 400A
- AC/DC Voltage Measurement to 1,000V
- Resistance Measurement to 40M Ohms
- Capacitance Ranges 100nF to 100mF
- Frequency Ranges 10Hz to 100kHz
- Duty Cycle Test
- Diode & Continuity Test
- Backlit Display
- Ergonomic Design with 1.2" Clamp Jaw
- Average AC Responding Measurements
- Inrush Current 100ms
- Relative Mode
- Data Hold
- Built-in AC Voltage detector
- Auto / Manual Ranging
- Auto Power Off with disable
- Built-in flashlight
- Measure temperature -4 to 1832°F
- Rubberized overmolded case
- Carrying Case (included)
- One Year Warranty



True RMS provides better accuracy.*

CM400 General Specifications

Display: 3-3/4 Digital LCD, with maximum reading of 4000.

Over Range Indication: LCD will display "OL".

Low Battery Indication: Battery symbol is displayed.

Sampling Rate: 3 times per second.

Operating Temperature: 5° to 40°C (41° to 104°F), less than 80%RH

Storage Temperature: -20° to 60°C (-4° to 140°F), less than 90%RH

Power Supply: Three "AAA" 1.5V batteries PPE #EN92 (Included)

Battery Life: Approx. 30 hours (Backlight ON), 100 hours (Backlight OFF).

Maximum Conductor Size: 30mm dia.

Weight: Approximately 9.5 oz. with battery.

Dimensions: 8.8"(L) x 3.0"(W) x 1.6"(H).

Accessories Included: Carrying Case, Leads, K-Type Thermocouple Bead Probe, 3 AAA Batteries, Manual.



Model CM400 and Accessories (old Model 9305)

Part No.	Description	Price
CM400	Compact Digital Clamp-On Multimeter	\$60.00
79-760	Test Leads w/ screw-on alligator clips (90°)	\$10.83

* "RMS" stands for root-mean-square, which is a calculation used to determine the equivalent DC value of an AC waveform.



PLASTIC PROCESS EQUIPMENT, INC.

8303 CORPORATE PARK DRIVE
MACEDONIA, OHIO 44056
216-367-7000 • FAX: 216-367-7022
TOLL FREE: 800-321-0562

6385 MONTESSOURI STREET
LAS VEGAS, NEVADA 89113
702-433-6385 • FAX: 702-433-6388
TOLL FREE: 800-258-8877

www.ppe.com

e-mail: sales@ppe.com

Toll Free: USA, Canada & Mexico

800-362-0706

Order Fax: 800-223-8305