




WIRE CONNECTORS

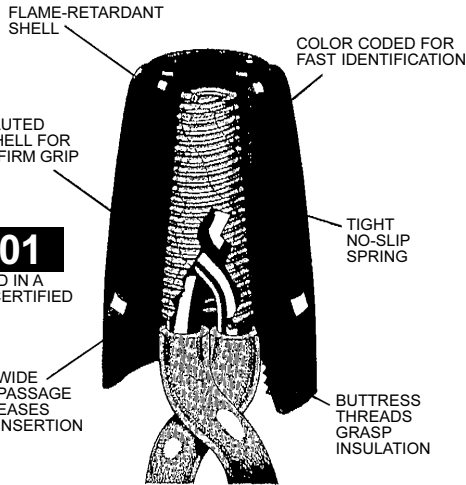

ISO-9001

MANUFACTURED IN A QUALITY SYSTEM CERTIFIED FACILITY.

TEMP
221°F
105°C

PPE Wire Connector Shells are made from high dielectric, smooth polypropylene plastic to eliminate porosity and surface cracking and resist practically all chemical action - unaffected by gasolines, oils, diluted acids and alkaline solutions. Heat resistant to 105°C (221°F).

- Durable, extra rugged shells are high-dielectric plastic.
- Tight no-slip spring. Easy starts, threads wire fast, no slips.
- Deep skirt. Extra protection. Serves to prevent flashover or exposure of bare wires.
- Wide passage makes wire insertion easier.
- Buttress threads. Screws into insulation to prevent electrical flash-over.
- Color coded for fast identification of sizes.
- Fluted shells for firm finger grip and accepts twist tool on larger sizes.

PART NO.	GB1	GB2	GB3	GB4	GB6	GB8
COLOR	GRAY	BLUE	ORANGE	YELLOW	RED	GRAY
WIRE COMB. RANGE	NO. 22-16 AWG MIN. 1 #20 + 1 #22 MAX. 2 #16	NO. 22-14 AWG MIN. 3 #22 MAX. 3 #16	NO. 22-14 AWG MIN. 3 #22 MAX. 2 #16 + 1 #18	NO. 18-12 AWG MIN. 1 #14 + 1 #18 MAX. 2 #14 + 3 #16	NO. 18-10 AWG MIN. 1 #12 + 2 #18 MAX. 3 #10	NO. 14-8 AWG MIN. 3 #12 MAX. 4 #10
1-3 PKS.	\$1.60 ea. pk.	\$1.95 ea. pk.	\$2.35 ea. pk.	\$2.70 ea. pk.	\$3.70 ea. pk.	\$7.60 ea. pk.
4-7 PKS.	1.55	1.90	2.25	2.60	3.55	7.30
8+ PKS.	1.45	1.80	2.15	2.45	3.40	7.00

PACKAGED 50 PIECES PER PACK

MIX OR MATCH

PORCELAIN WIRE CONNECTORS FOR HI-TEMPERATURE APPLICATIONS

SUPER HI-TEMP

TEMP
1742°F
950°C


TENSILE STRENGTH
2000 P.S.I.



PART NO.	PWN18	PWN17	PWN16
WIRE COMB. RANGE	MIN. 3 #24 MAX. 2 #20	MIN. 4 #22 MAX. 3 #16	MIN. 4 #16 MAX. 3 #10
10-49 PCS.	\$.30 ea.	\$.32 ea.	\$.35 ea.
50-99 PCS.	.29	.30	.33
100+ PCS.	.25	.26	.30

MIX OR MATCH FOR PRICE BREAKS


1/4" INSULATED QUICK DISCONNECTS



- 300 volts
- Full nylon insulation
- Tab size .250" x .032"
- 220°F temperature
- Tin plated copper sleeve
- Tin plated brass terminal
- Ideal for assembly application
- UL & CSA approval


WIRE GAUGE RANGE	PART NUMBER	MALE OR FEMALE	PACKAGED 50 PCS. PER PACK	
			1-3 PACKS	4 PACKS
22-16	QD2216F	FEMALE	\$5.65	\$5.20 ea.
22-16	QD2216M	MALE		
16-14	QD1614F	FEMALE	\$5.65	\$5.20 ea.
16-14	QD1614M	MALE		

CERAMIC TERMINAL COVERS



SPECIFY THD.

A convenient and economical way to insulate post terminals. Sized for standard length posts.

PART NO	THREAD SIZE	TYPE	PRICES	
			1-24	25+
1024	10-24		\$.78 ea	\$.72 ea
1032	10-32		.78	.72
1420	1/4-20		1.90	1.80



PLASTIC PROCESS EQUIPMENT, INC.

www.ppe.com • e-mail: sales@ppe.com

PPE WEST 6385 Montessouri Street, Las Vegas, Nevada 89113
702-433-6385 • 800-258-8877 • Fax: 702-433-6388

PPE SOUTH 11218 Challenger Avenue, Odessa, Florida 33556
727-834-8888 • 800-282-6783 • Fax: 727-834-8873

8303 CORPORATE PARK DRIVE, MACEDONIA (Cleveland), OHIO 44056, USA

Toll Free: USA, Canada & Mexico
800-362-0706

216-367-7000 • Toll Free: 800-321-0562 • Fax: 216-367-7022 • Order Fax: 800-223-8305