



# HEATER BAND ORDER FORM CONFIRMATION

1. QUANTITY: \_\_\_\_\_ 2. MACHINE MAKE AND TYPE: \_\_\_\_\_

3. TYPE OF HEATER:

- ☐ PREMIUM MICA ☐ EXPANDABLE MICA (4" dia. & over) ☐ MINERAL INSULATED BAND ☐ STARFLEX  
☐ STANDARD CERAMIC (1/4" insulation) ☐ ULTRA THIN CERAMIC (3/16" insulation) ☐ INSULATION MAX<sup>®</sup> CERAMIC (1/2" insulation)

4. DESIGN OF HEATER: (see catalog) \_\_\_\_\_ i.e. wedge lock, flange lock, etc.

5. ELECTRICAL SPEC'S:

- Voltage: \_\_\_\_\_ Volts To determine heater  
Wattage: \_\_\_\_\_ Watts wattage multiply  
☐ Dual Voltage 3.14 x I.D. x width.

6. ELECTRICAL CONN: (Specify)

- ☐ Flex Leads Type C: Length (std 10 in.) \_\_\_\_\_ in.  
☐ Metal Braid Type B: Length \_\_\_\_\_ in.  
☐ Armor Conduit Type A: Length \_\_\_\_\_ in.  
☐ Post Terminals 10-24 Thread (standard - Mica)  
☐ Post Terminals 10-32 Thread  
☐ Post Terminals 1/4-20 Thread (standard - Ceramic)  
☐ Terminal Box  
☐ Ceramic Terminal Covers  
☐ Plug (Specify)  
☐ Euro Style Plug: Vertical or Horizontal  
☐ Twist Plug  
☐ Grounding Provision  
☐ 3 Phase

7. HEATER CONSTRUCTION:

- ☐ Standard One Piece  
☐ 2 Piece Construction  
Voltage each half: \_\_\_\_\_  
☐ Hinged Construction  
☐ Expandable  
☐ Stainless Steel Inner Liner  
☐ T/C or Clearance Holes (specify location)  
Hole Diameter: \_\_\_\_\_  
No. of Holes: \_\_\_\_\_

8. LOCKUP:

- ☐ Straps  
☐ Flange  
☐ Wedge Lock


SPECIAL LOCKUP:

- ☐ Full Width Strap  
☐ Welded Barrel Nut


**NOTE:** Indicate hole/s location on drawing below by indicating the appropriate angle and location on the side view.

## ★★ EXPRESS DELIVERY FOR ★★ CUSTOM MADE HEATER BANDS

FOR EXPRESS EXTRA FAST DELIVERY ON PREMIUM HEATER BANDS  
FOR SHIPPING IN 7 WORKING DAYS ADD 20% SURCHARGE.  
FOR SHIPPING IN 5 WORKING DAYS ADD 30% SURCHARGE.  
FOR SHIPPING IN 3 WORKING DAYS ADD 50% SURCHARGE.

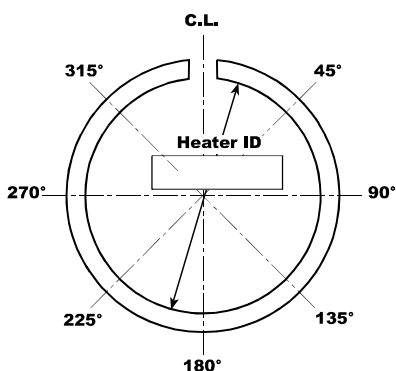

1 PIECE DESIGN

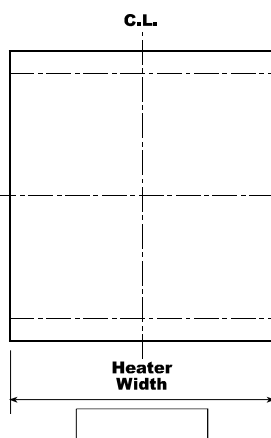

2 PIECE DESIGN

Possibility of over/under on quantities of special orders

PPE Mica & Ceramic

QTY. Ordered	Over/Under QTY.
1-5	No Variation
6-24	± 1pc
25-49	± 2pcs
50-99	± 3pcs
100+	± 5%

Mineral Insulated

QTY. Ordered	Over/Under QTY.
1-5	No Variation
6-24	± 1pc
25-49	± 2pcs
50-99	± 3pcs
100+	± 5%

COMPANY NAME: \_\_\_\_\_

YOUR NAME: \_\_\_\_\_ / SIGNATURE: \_\_\_\_\_

TELEPHONE: (\_\_\_\_\_) - \_\_\_\_\_ - \_\_\_\_\_ FAX: (\_\_\_\_\_) - \_\_\_\_\_ - \_\_\_\_\_

E-MAIL: \_\_\_\_\_ PPE SALES PERSON: \_\_\_\_\_

© Copyright 2023 Plastic Process Equipment, Inc. Note: PPE customers may reproduce this form only in it's entirety. QUOTE# \_\_\_\_\_



## PLASTIC PROCESS EQUIPMENT, INC.

8303 CORPORATE PARK DRIVE  
MACEDONIA, OHIO 44056-2300  
216-367-7000 • FAX: 216-367-7022  
TOLL FREE: 800-321-0562

6385 MONTESSOURI STREET  
LAS VEGAS, NEVADA 89113-1186  
702-433-6385 • FAX: 702-433-6388  
TOLL FREE: 800-258-8877

www.ppe.com

e-mail: sales@ppe.com

Toll Free: USA, Canada & Mexico

**800-362-0706**

Order Fax: 800-223-8305