



PREMIUM CARTRIDGE HEATERS

OEM REPLACEMENT HI-DENSITY DIE HEATER

LONGEST LASTING - MOISTURE PROOF!


FEATURES

- Hi-Density Swaged Construction
- Moisture Proof, RTV/Cement Potted
- 36" Mica Insulated Lead Wires
- 3 Lead Options
- 1" and 1/2" Diameter Heater Sheath
- 16 Gauge Stainless Steel Mounting Flange
- Designed for 240VAC




Shown:
#P8035-20600A
240V, 600W
1" Diameter with Mounting Flange
Braided Stainless Steel Leads

1" DIAMETER HEATER SHEATH WITH MOUNTING FLANGE

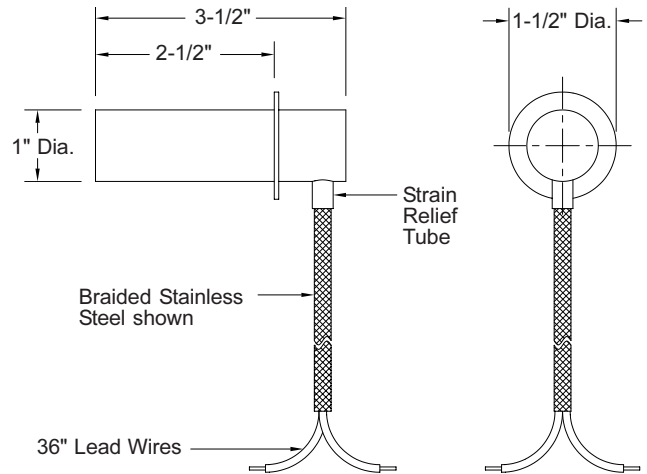


PART NO.	VOLTS	WATTS	LEAD TYPE	PRICE
P8035-20600D	240	600	Flex Leads	\$59.95
P8035-20600A	240	600	Braided Stainless Steel	\$64.30
P8035-20600E	240	600	Armored Flex Hose	\$64.30

1/2" DIAMETER HEATER SHEATH

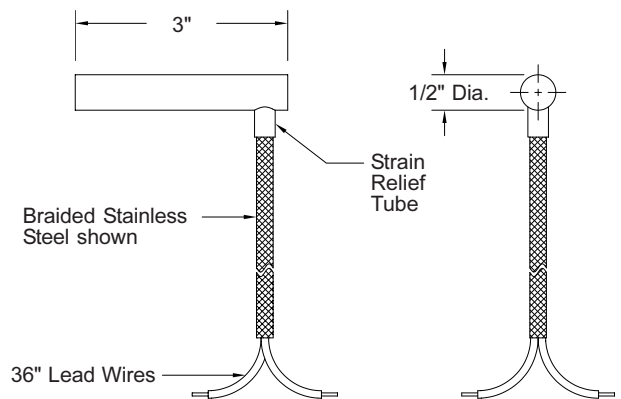

PART NO.	VOLTS	WATTS	LEAD TYPE	PRICE
P4030-20300D	240	300	Flex Leads	\$31.20
P4030-20300A	240	300	Braided Stainless Steel	\$39.90
P4030-20300E	240	300	Armored Flex Hose	\$41.60

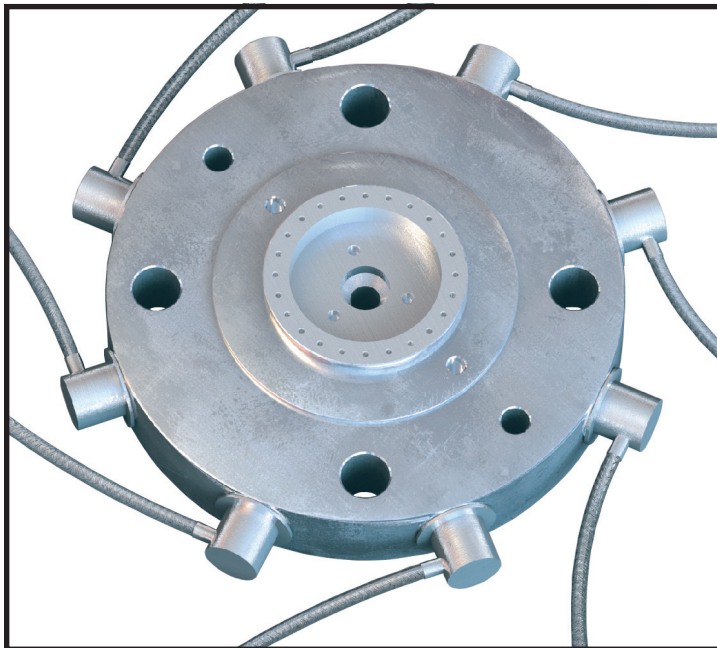

Eight (8) #P8035-20600A shown used in a blow mold rotor.



PLASTIC PROCESS EQUIPMENT, INC.

6385 Montessouri Street, Las Vegas, Nevada 89113
702-433-6385 • 800-258-8877 • Fax: 702-433-6388

11218 Challenger Avenue, Odessa, Florida 33556
727-834-8888 • 800-282-6783 • Fax: 727-834-8873

www.ppe.com • e-mail: sales@ppe.com

8303 CORPORATE PARK DRIVE, MACEDONIA (Cleveland), OHIO 44056, USA

216-367-7000 • Toll Free: 800-321-0562 • Fax: 216-367-7022 • Order Fax: 800-223-8305

Toll Free: USA, Canada & Mexico
800-362-0706