


HELIX COILED NOZZLE HEATERS


TYPE

2

HOT SPRUE BUSHINGS & EXTERNALLY HEATED MANIFOLD SYSTEMS

Helix heaters are the ultimate design in the coiled type heater market. Their design and technical development gives them longer life due to special features and manufacturing methods that surpass all others. Many features are proprietary and were developed to give you the most efficient design possible.

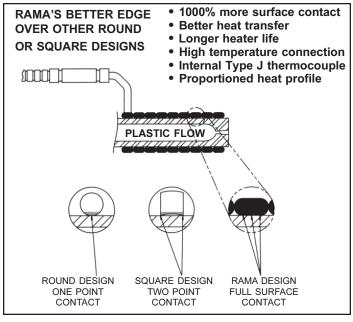




A


*DESIGN LIMITS WITH STANDARD MATERIALS


NOMINAL I.D. FLATTENED	O.D.	LENGTH (L)		**WATTS		LEADWIRE
		MAX	MIN	MAXIMUM	MINIMUM	LEADWIRE
0.500 (1/2)	0.75	5.0	1.5	177 X (L)	160 ÷ (L)	36" LEADWIRE 34" CONDUIT
0.750 (3/4)	1.00	5.0	1.0	248 X (L)	164 ÷ (L)	
0.866 (22mm)	1.12	4.79	1.0	280 X (L)	145 ÷ (L)	
0.875 (7/8)	1.13	4.75	1.0	282 X (L)	143 ÷ (L)	
0.984 (25mm)	1.23	4.00	1.0	317 X (L)	128 ÷ (L)	


**APPLIES TO TIGHT WOUND HEATERS @ 240V - MAXIMUM TOTAL WATTS IS 900. *REFER TO FACTORY FOR NON-STANDARD DESIGNS.

STANDARD FEATURES

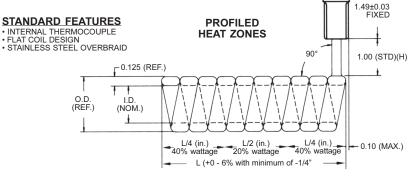









8303 CORPORATE PARK DRIVE **MACEDONIA, OHIO 44056-2300** 216-367-7000 • FAX: 216-367-7022

TOLL FREE: 800-321-0562

ASTIC PROCESS EQUIPMENT, INC.

6385 MONTESSOURI STREET LAS VEGAS, NEVADA 89113-1186 702-433-6385 • FAX: 702-433-6388

TOLL FREE: 800-258-8877



e-mail: sales@ppe.com

Toll Free: USA, Canada & Mexico 800-362-0706

Order Fax: 800-223-8305