




PREMIUM CUSTOM HEATER DESIGNS

TYPE B = Straight



TYPE A = 90°



TYPE-A & B

STAINLESS STEEL BRAID SWAGED-IN

Stainless steel braid provides abrasion protection while allowing the leads to be bent to a tight radius. Available straight or right angle.

TYPE C = Straight



TYPE K = 90°




TYPE-C & K

STAINLESS STEEL FLEXIBLE CONDUIT SWAGED-IN

Stainless steel flexible conduit provides the ultimate in lead protection. Flexible conduit also allows connection to electrical boxes. Available straight or right angle.

TYPE H = Brass
TYPE SH = Stainless





Heater Diameter	NPT Size
1/4"	1/8"
3/8"	1/4"
1/2"	3/8"
5/8"	1/2"
3/4"	3/4"

TYPE-H & SH

HEX HEAD PIPE FITTINGS

Hex head pipe fittings are available in brass or stainless steel. Brass fittings are brazed on and stainless can be brazed or welded on. Fitting sizes are listed.

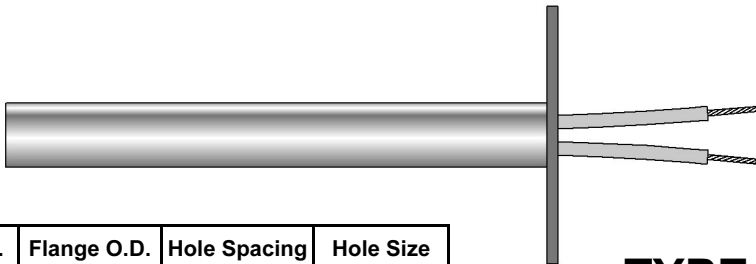

Heater Dia.	Flange O.D.	Hole Spacing	Hole Size
1/4"	1-1/2"	1-1/8"	.156"
3/8"	1-1/2"	1-1/8"	.156"
1/2"	1-1/2"	1-1/8"	.156"
5/8"	1-1/2"	1-1/8"	.156"
3/4"	1-1/2"	1-1/8"	.156"

TYPE-F FLANGES

Small flanges can be welded onto the lead end of the heater. Flanges can be used to hold the heater in place to prevent movement during operation. Flanges also assist with heater removal. Flanges are 1/16" thick.



PLASTIC PROCESS EQUIPMENT, INC.

www.ppe.com • e-mail: sales@ppe.com

PPE WEST 6385 Montessouri Street, Las Vegas, Nevada 89113
702-433-6385 • 800-258-8877 • Fax: 702-433-6388

PPE SOUTH 11218 Challenger Avenue, Odessa, Florida 33556
727-834-8888 • 800-282-6783 • Fax: 727-834-8873

8303 CORPORATE PARK DRIVE, MACEDONIA (Cleveland), OHIO 44056, USA

Toll Free: USA, Canada & Mexico
800-362-0706

PPE 216-367-7000 • Toll Free: 800-321-0562 • Fax: 216-367-7022 • Order Fax: 800-223-8305