



# CERAMIC HEATER BANDS

## 3 TYPES AVAILABLE


### SAVE ENERGY - USE LESS ELECTRICITY

### 3 TYPES AVAILABLE

- 1.) MAX: 1/2" Insulation x 15/16" thick O.A.
- 2.) Standard: 1/4" Insulation x 5/8" thick O.A.
- 3.) UltraThin: 3/16" Insulation x 7/16" thick O.A.



**INSULATION MAX®  
TYPE SHOWN  
A FULL 1/2" TOTAL  
INSULATION  
15/16" THICK**

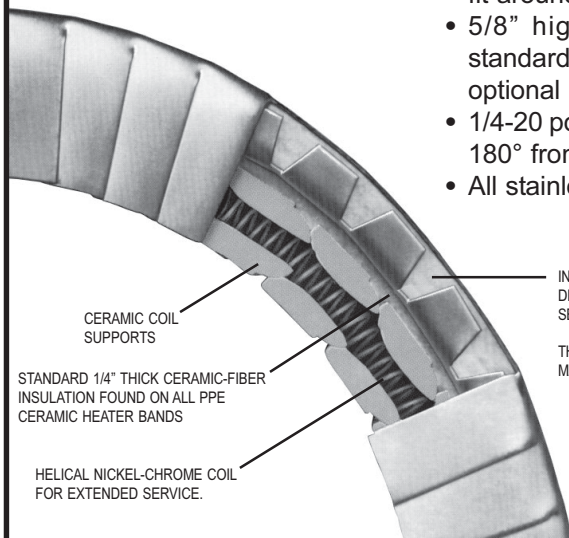

STANDARD 1/4" THICK CERAMIC-FIBER INSULATION FOUND ON ALL PPE CERAMIC HEATER BANDS

HELICAL NICKEL-CHROME COIL FOR EXTENDED SERVICE.

CERAMIC COIL SUPPORTS

### - SPECIFICATIONS -

- Expandable, will open fully to fit around barrel O.D.
- 5/8" high lock-up flanges standard or barrel nut clamp optional N/C.
- 1/4-20 post terminals located 180° from gap.
- All stainless steel sheath.

### TO ORDER SPECIFY

1. Ceramic design.
2. Inside diameter x width.
3. Voltage and wattage.
4. Lock-up option, flange or barrel nut clamp.
5. Post terminals or other type.
6. Terminal box if required.
7. Thermocouple hole and location.

INSULATION MAX® EMPLOYS AN ADDITIONAL 1/4" OF HIGH DENSITY CERAMIC-FIBER INSULATION ENCASED IN A SEPARATE FLEXIBLE STAINLESS STEEL SHELL.

THE INSULATION IS NOT COMPRESSED WHICH PROVIDES MAXIMUM R VALUE.

**Genuine O.E.M. Replacements**  
Also available in Standard Construction and Ultra Thin.

INSULATION MAX® is a registered trademark of Plastic Process Equipment, Inc.

### SAVE ENERGY - USE LESS ELECTRICITY



## PLASTIC PROCESS EQUIPMENT, INC.

www.ppe.com • e-mail: sales@ppe.com



6385 Montessouri Street, Las Vegas, Nevada 89113  
702-433-6385 • 800-258-8877 • Fax: 702-433-6388



11218 Challenger Avenue, Odessa, Florida 33556  
727-834-8888 • 800-282-6783 • Fax: 727-834-8873

8303 CORPORATE PARK DRIVE, MACEDONIA (Cleveland), OHIO 44056, USA

216-367-7000 • Toll Free: 800-321-0562 • Fax: 216-367-7022 • Order Fax: 800-223-8305

Toll Free: USA, Canada & Mexico  
**800-362-0706**