



DRAWER MAGNET ORDER BLANK

FOR CARBON STEEL MODELS - CERAMIC



MAKE OF MACHINE _____

MODEL _____

SCREW SIZE _____

OUNCE CAPACITY _____


OPTION SPECIFICATION:

- With Slide Gate (front only)
- With Side Feed Chute (left or right side only)
- With Dump Chute
- With Liquid Dispensing Tube 1/2" NPT
- 3/8" Thick Flange required for 3/8" Tapped Holes
- 1/2" Thick Flange required for 1/2" Tapped Holes

OPEN LOCATION:

(Indicate left, right, front, back)

**FOR SQUARE OR
RECTANGULAR
THROAT OPENINGS**

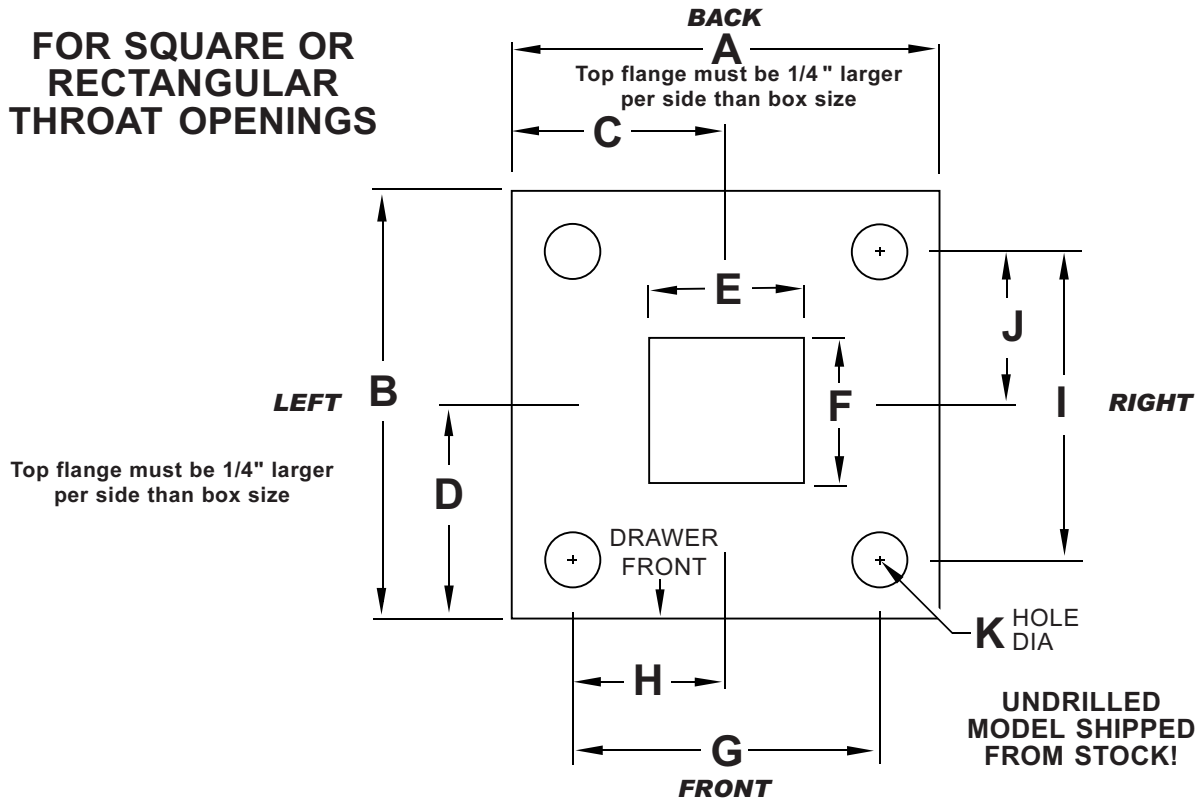

Top flange must be 1/4" larger per side than box size

TOP FLANGE

BOTTOM FLANGE

A	_____	A	_____
B	_____	B	_____
C	_____	C	_____
D	_____	D	_____
E	_____	E	_____
F	_____	F	_____
G	_____	G	_____
H	_____	H	_____
I	_____	I	_____
J	_____	J	_____
K	_____	K	_____

"K": DRILLED & TAPPED

FLANGE REQUIREMENTS

- 1.) 1/4" Tapped Holes requires our standard 1/4" thick flange.
- 2.) 3/8" Tapped Holes requires optional 3/8" thick flange.
- 3.) 1/2" Tapped Holes requires optional 1/2" thick flange.

PPE Customers may copy this form as they need.
© Plastic Process Equipment, Inc. 2019

TOP FLANGE HOLES ARE DRILLED AND TAPPED



PLASTIC PROCESS EQUIPMENT, INC.

www.ppe.com • e-mail: sales@ppe.com

PPE WEST 6385 Montessouri Street, Las Vegas, Nevada 89113
702-433-6385 • 800-258-8877 • Fax: 702-433-6388

PPE SOUTH 11218 Challenger Avenue, Odessa, Florida 33556
727-834-8888 • 800-282-6783 • Fax: 727-834-8873

8303 CORPORATE PARK DRIVE, MACEDONIA (Cleveland), OHIO 44056, USA

Toll Free: USA, Canada & Mexico
800-362-0706

216-367-7000 • Toll Free: 800-321-0562 • Fax: 216-367-7022 • Order Fax: 800-223-8305