




HYDRAULIC OIL FILTRATION SYSTEM MACHINE MOUNTED MODEL

ON SALE

SPECIFICATIONS & FEATURES

- Filter chamber is constructed of carbon steel with 125 PSI maximum rating EPDM O-Ring closure.
- Positive displacement self-priming gear pump with built-in relief valve set at 35 PSI and Buna-N mechanical seal.
- Motor; 115V/1/60, 1/3 H.P., 1725 RPM, with 8 ft. of 3-wire extension cord and 3-prong plug.
- Filter chamber holds two (2) filter cartridges.
- 3/8" suction hose barb & 3/8" discharge hose barb.
- 1/2" NPT female threads so unit can be piped into hydraulic reservoir.
- Mounting Plate.
- Suction strainer to protect pump.
- Petcock vent and drain plug.
- Pressure gauge mounted on gauge snubber, 0-100 PSI.
- High volume pump 3 GPM (180 G.P.H.).
- Filter area 7 sq. ft., solids area.
- Dimensions: 9" deep x 15" wide x 24" high.
- 60 lbs. approximate shipping weight.

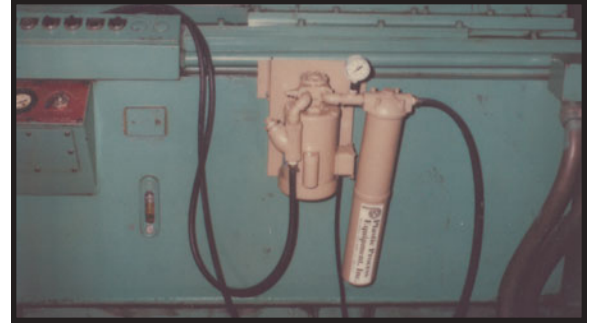

**SALE
PRICE**

MACHINE MOUNTED MODEL

PART NO. STS4P ~~\$750.00~~ ea.

COTTON FILTER CARTRIDGES (2-1/2" dia. x 10" lg.)

PART NO.	MICRON SIZE	PRICE EA.
5C10TC	5	\$3.05
10C10T	10	2.90
15C10T	15	2.75



PLASTIC PROCESS EQUIPMENT, INC.

www.ppe.com • e-mail: sales@ppe.com

PPE WEST 3615 Walnut Avenue, Chino, California 91710, U.S.A.
909-627-8511 • 800-258-8877 • Fax: 909-627-8101

PPE SOUTH 11218 Challenger Avenue, Odessa, Florida 33556, U.S.A.
727-834-8888 • 800-282-6783 • Fax: 727-834-8873

8303 CORPORATE PARK DRIVE, MACEDONIA (Cleveland), OHIO 44056, U.S.A.

Toll Free: USA, Canada & Mexico
1-800-362-0706

216-367-7000 • Toll Free: 800-321-0562 • Fax: 216-367-7022 • Order Fax: 800-223-8305