



HEAVY DUTY

MACHINE MOUNTING PADS

WITH BUILT-IN LEVEL ADJUSTMENT

100 TO 12,000 LBS. LOADING PER MOUNT



Here's how to select the right PPE Mount:

- 1 Determine weight of machine.
- 2 Divide weight of machine by number of lagging bolt holes to determine maximum load per mount. If load is not distributed evenly, estimate load on each mount.
- 3 Refer to Load Range chart below for correct PPE Mount.

UP TO 1" HEIGHT ADJUSTMENT
CHECK THE COMPETITION

ISO-9001

MANUFACTURED IN A QUALITY SYSTEM CERTIFIED FACILITY.

ALL METAL PARTS ZINC PLATED FOR LONG LIFE

LEVELING SCREW (LONGER SCREWS AVAILABLE. MUST BE PURCHASED AS AN EXTRA.)


LOCKING NUT & WASHER

HEAVY THEADED LEVELING PLATE

HEAVY DUTY DRAWN STEEL SUPPORT PLATE

SNAP RINGS RETAIN MOUNTS TO LEVELING PLATE WHEN LIFTING MACHINE

EXTRA THICK HIGH DENSITY VIBRATION DAMPENING CHLOROPRENE RUBBER RESISTANT TO OIL AND WATER

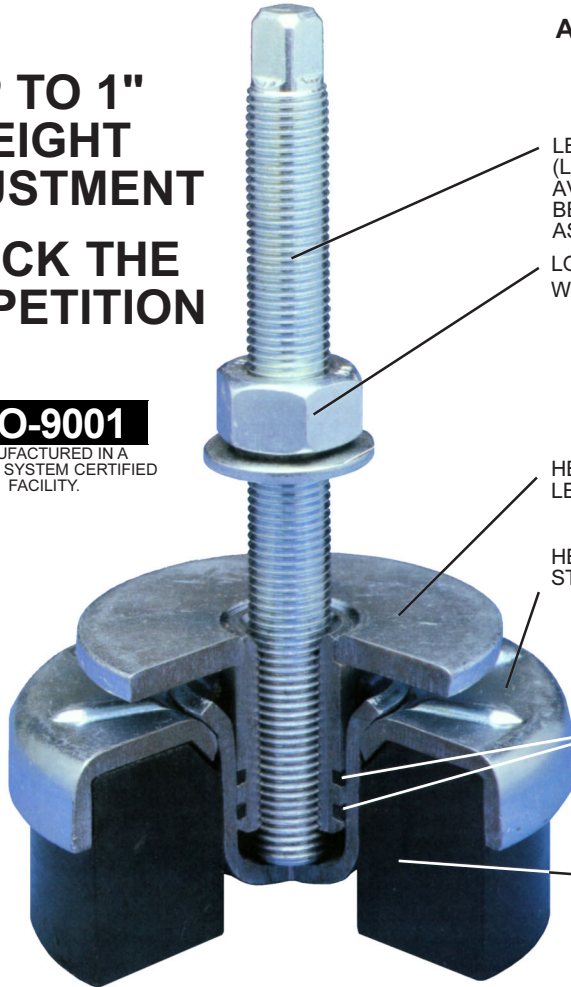

-SPARE PARTS-

PART	SIZE	PART NO.	PRICE
BOLT	M-12X4-3/4"	M12X4	\$5.40
BOLT	M-16X4-3/4"	M16X4	\$6.45
BOLT	M-20X6-7/8"	M20X6	\$10.75
BOLT	M-12X8"	M12X8	\$20.00
BOLT	M-16X8"	M16X8	\$24.35
BOLT	M-20X10"	M20X10	\$33.90
LOCK NUT	M-12	M12LN	\$.55
LOCK NUT	M-16	M16LN	\$.90
LOCK NUT	M-20	M20LN	\$1.70
WASHER	M-12	M12W	\$.40
WASHER	M-16	M16W	\$.55
WASHER	M-20	M20W	\$.85

* Models 3A and 5A include a special bushing with M20 to M16 threads and a M16 threaded bolt.

				*Smaller Diameter Bolt	Extra Heavy Duty	Extra Heavy Duty	*Smaller Diameter Bolt
SPECIFICATION/PART#	MODEL-1	MODEL-2	MODEL-3	MODEL-3A	MODEL-4	MODEL-5	MODEL-5A
PRICES 1-8	\$42.00	\$80.60	\$116.50	\$117.25	\$140.00	\$228.00	\$218.00
9 OR MORE	\$40.25	\$77.25	\$111.75	\$112.50	\$134.00	\$218.50	\$208.50
DIAMETER	3-1/8"	4-3/4"	6-5/16"	6-5/16"	6-5/16"	7-7/8"	7-7/8"
HEIGHT, INCL. LEVELING PLATE	1-5/8"	1-15/16"	2-5/16"	2-5/16"	2-5/16"	2-23/32"	2-23/32"
LEVEL ADJUSTMENT	7/8"	7/8"	1"	1"	1"	1"	1"
OVER-ALL HEIGHT	5-1/4"	5-1/4"	7-1/2"	5-1/2"	7-1/2"	7-7/8"	5-7/8"
LEVELING BOLT (METRIC)	M12X1.25mm	M16X1.50mm	M20X1.50mm	M16X1.50mm	M20X1.50mm	M20X1.50mm	M16X1.50mm
LEVELING BOLT LENGTH	4-3/4"	4-3/4"	6-7/8"	4-3/4"	6-11/16"	6-11/16"	4-3/4"
APPROX. SHIPPING WEIGHT	2lbs.	4lbs.	7lbs.	7lbs.	8lbs.	14lbs.	13lbs.
LOAD RANGE PER MOUNT(LBS.) NON-IMPACT MACHINERY	100-1,100	880-2,200	1,760-5,500	1,800-5,500	3,300-8,800	6,600-12,000	3,500-11,000
125 OR LESS STROKES PER MIN.	150-500	500-1,200	1,200-3,850	1,200-3,850	3,520-6,160	5,940-8,800	2,400-7,500
125-160 STROKES PER MIN.	150-350	350-850	1,000-3,000	1,000-3,000	2,090-4,620	4,290-7,700	2,000-6,000
160-200 STROKES PER MIN.	100-275	275-650	700-2,000	700-2,000	1,650-3,080	2,860-5,280	1,300-3,750

1. Above loads are conservative to ensure maximum vibration dampening and noise elimination.

2. PPE Mounts are NOT designed for use on machines that must be fastened to the floor to prevent tipping.

3. Longer leveling screws are available see spare parts.



PLASTIC PROCESS EQUIPMENT, INC.

8303 CORPORATE PARK DRIVE
MACEDONIA, OHIO 44056-2300
216-367-7000 • FAX: 216-367-7022
TOLL FREE: 800-321-0562

6385 MONTESSOURI STREET
LAS VEGAS, NEVADA 89113-1186
702-433-6385 • FAX: 702-433-6388
TOLL FREE: 800-258-8877

www.ppe.com
e-mail: sales@ppe.com

Toll Free: USA, Canada & Mexico
800-362-0706

Order Fax: 800-223-8305