



# DRAWER MAGNET ORDER BLANK

## FOR CARBON STEEL MODELS - CERAMIC



MAKE OF MACHINE \_\_\_\_\_ MODEL \_\_\_\_\_  
 SCREW SIZE \_\_\_\_\_ OUNCE CAPACITY \_\_\_\_\_

### FOR ROUND, SQUARE OR RECTANGULAR THROAT OPENINGS

#### TOP FLANGE


- Throat Opening:  Round\*  
 Square  
 Rectangle

A \_\_\_\_\_  
 B \_\_\_\_\_  
 C \_\_\_\_\_  
 D \_\_\_\_\_  
 E \_\_\_\_\_  
 F \_\_\_\_\_  
 G \_\_\_\_\_  
 H \_\_\_\_\_  
 I \_\_\_\_\_  
 J \_\_\_\_\_  
 K \_\_\_\_\_

#### BOTTOM FLANGE

- Throat Opening:  Round\*  
 Square  
 Rectangle

A \_\_\_\_\_  
 B \_\_\_\_\_  
 C \_\_\_\_\_  
 D \_\_\_\_\_  
 E \_\_\_\_\_  
 F \_\_\_\_\_  
 G \_\_\_\_\_  
 H \_\_\_\_\_  
 I \_\_\_\_\_  
 J \_\_\_\_\_  
 K \_\_\_\_\_

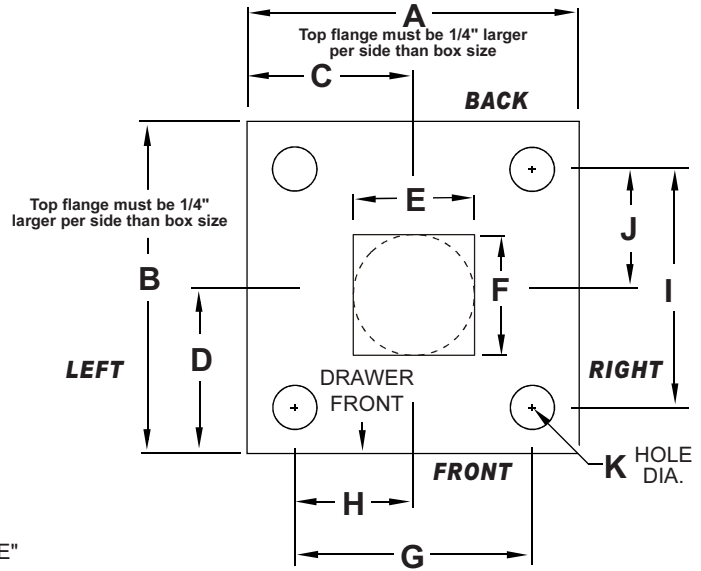


#### "K": DRILLED & TAPPED FLANGE REQUIREMENTS

- 1.) 1/4" Tapped Holes requires our standard 1/4" thick flange.
- 2.) 3/8" Tapped Holes requires optional 3/8" thick flange.
- 3.) 1/2" Tapped Holes requires optional 1/2" thick flange.

\* For Round Throat opening list "E" as diameter and leave "F" blank.

#### OPTION SPECIFICATION:

- With Slide Gate (front only)
- With Side Feed Chute (left or right side only)
- With Dump Chute 1-1/2" NPT
- With Liquid Dispensing Tube 1/2" NPT
- 3/8" Tapped Holes required for 3/8" Thick Flange
- 1/2" Tapped Holes required for 1/2" Thick Flange

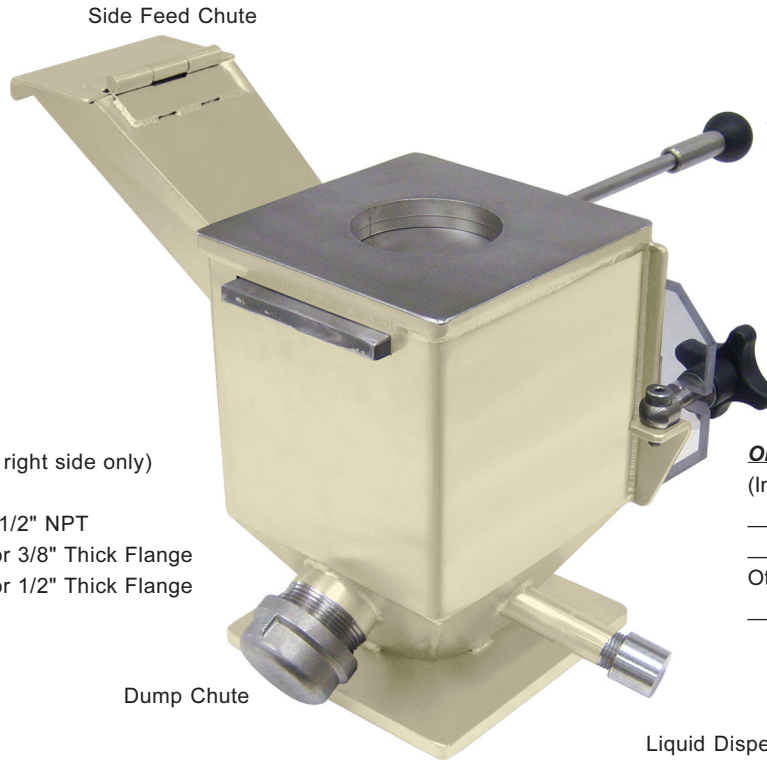

Slide Gate (shown closed)  
Front mount only.

#### OPENING LOCATION:

(Indicate Left, Right, Front, Back)

\_\_\_\_\_  
 \_\_\_\_\_  
 Other: \_\_\_\_\_  
 \_\_\_\_\_

Liquid Dispensing Tube  
1/2" NPT



## PLASTIC PROCESS EQUIPMENT, INC.

8303 CORPORATE PARK DRIVE  
 MACEDONIA, OHIO 44056-2300  
 216-367-7000 • FAX: 216-367-7022  
 TOLL FREE: 800-321-0562

6385 MONTESSOURI STREET  
 LAS VEGAS, NEVADA 89113-1186  
 702-433-6385 • FAX: 702-433-6388  
 TOLL FREE: 800-258-8877

www.ppe.com

e-mail: sales@ppe.com

Toll Free: USA, Canada & Mexico

**800-362-0706**

Order Fax: 800-223-8305