




OETIKER 1-EAR CLAMPS

ZINC PLATED OR STAINLESS STEEL

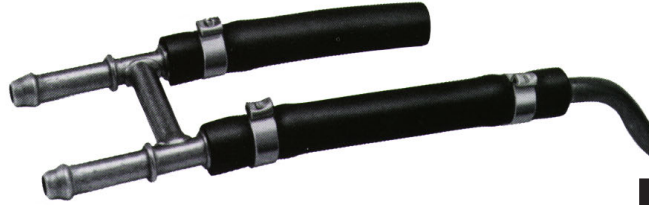

**AVAILABLE IN
STAINLESS STEEL**

ISO 9001
MANUFACTURED IN A
QUALITY SYSTEM CERTIFIED
FACILITY.

NOMINAL SIZE	CLAMPING RANGES		ZINC PLATED			STAINLESS STEEL			CLAMPS PER BAG
	INCHES CLOSED-OPEN	MILLIMETERS CLOSED-OPEN	PART NO.	PRICES EA.		PART NO.	PRICES EA.		
				1-99	100+		1-99	100+	
3/8"	.350 - .414	8.9 - 10.5	EC105	\$.13	\$.12	EC105R	\$.17	\$.16	1000
7/16"	.381 - .444	9.7 - 11.3	EC113	\$.14	\$.13	EC113R	\$.18	\$.17	
15/32"	.394 - .486	10.4 - 12.3	EC123	\$.14	\$.13	EC123R	\$.18	\$.17	
1/2"	.453 - .524	11.4 - 13.3	EC133	\$.14	\$.13	EC133R	\$.18	\$.17	
9/16"	.496 - .571	12.6 - 14.5	EC145	\$.14	\$.13	EC145R	\$.18	\$.17	500
5/8"	.543 - .618	13.8 - 15.7	EC157	\$.14	\$.13	EC157R	\$.18	\$.17	
11/16"	.594 - .669	15.1 - 17.0	EC170	\$.14	\$.13	EC170R	\$.19	\$.18	
23/32"	.618 - .728	15.7 - 18.5	EC185	\$.14	\$.13	EC185R	\$.19	\$.18	
3/4"	.669 - .779	17.0 - 19.8	EC198	\$.15	\$.14	EC198R	\$.20	\$.19	
13/16"	.716 - .827	18.2 - 21.0	EC210	\$.15	\$.14	EC210R	\$.20	\$.19	
7/8"	.779 - .890	19.8 - 22.6	EC226	\$.15	\$.14	EC226R	\$.22	\$.21	250
15/16"	.839 - .949	21.3 - 24.1	EC241	\$.15	\$.14	EC241R	\$.22	\$.21	
1"	.898 - 1.008	22.8 - 25.6	EC256	\$.16	\$.15	EC256R	\$.22	\$.21	500
1-1/16"	.945 - 1.067	24.0 - 27.1	EC271	\$.16	\$.15	EC271R	\$.23	\$.22	
1-1/8"	1.004 - 1.126	25.5 - 28.6	EC286	\$.16	\$.15	EC286R	\$.24	\$.23	250
1-3/16"	1.063 - 1.185	27.0 - 30.1	EC301	\$.17	\$.16	EC301R	\$.24	\$.23	
1-1/4"	1.122 - 1.244	28.5 - 31.6	EC316	\$.17	\$.16	EC316R	\$.24	\$.23	500
1-5/16"	1.181 - 1.303	30.0 - 33.1	EC331	\$.17	\$.16	EC331R	\$.25	\$.24	
1-3/8"	1.240 - 1.362	31.5 - 34.6	EC346	\$.18	\$.17	EC346R	\$.25	\$.24	250
1-7/16"	1.299 - 1.421	33.0 - 36.1	EC361	\$.18	\$.17	EC361R	\$.25	\$.24	
1-15/32"	1.358 - 1.480	34.5 - 37.6	EC376	\$.19	\$.18	EC376R	\$.27	\$.25	100
1-1/2"	1.378 - 1.500	35.0 - 38.1	EC381	\$.19	\$.18	EC381R	\$.27	\$.25	
1-9/16"	1.437 - 1.559	36.5 - 39.6	EC396	\$.20	\$.19	EC396R	\$.28	\$.26	
1-5/8"	1.492 - 1.614	37.9 - 41.0	EC410	\$.20	\$.19	EC410R	\$.28	\$.26	
1-11/16"	1.551 - 1.673	39.4 - 42.5	EC425	\$.20	\$.19	EC425R	\$.28	\$.26	
1-23/32"	1.610 - 1.732	40.9 - 44.0	EC440	\$.21	\$.20	EC440R	\$.29	\$.27	
1-3/4"	1.669 - 1.791	42.4 - 45.4	EC455	\$.22	\$.21	EC455R	\$.29	\$.27	
1-13/16"	1.728 - 1.850	43.9 - 47.0	EC470	\$.22	\$.21	EC470R	\$.31	\$.29	
1-7/8"	1.787 - 1.909	45.4 - 48.5	EC485	\$.23	\$.22	EC485R	\$.31	\$.29	
1-15/16"	1.846 - 1.968	46.9 - 50.0	EC500	\$.23	\$.22	EC500R	\$.31	\$.29	
2"	1.905 - 2.028	48.4 - 51.5	EC515	\$.24	\$.23	EC515R	\$.31	\$.29	100
2-1/8"	2.024 - 2.146	51.4 - 54.5	EC545	\$.25	\$.24	EC545R	\$.32	\$.30	
2-1/4"	2.142 - 2.264	54.5 - 57.5	EC575	\$.26	\$.25	EC575R	\$.33	\$.31	
2-3/8"	2.260 - 2.382	57.4 - 60.5	EC605	\$.28	\$.26	EC605R	\$.34	\$.32	
2-1/2"	2.378 - 2.500	60.4 - 63.5	EC635	\$.29	\$.27	EC635R	\$.35	\$.33	
2-5/8"	2.496 - 2.618	63.4 - 66.5	EC665	\$.30	\$.28	EC665R	\$.36	\$.34	
2-3/4"	2.673 - 2.795	67.9 - 71.0	EC710	\$.32	\$.30	EC710R	\$.38	\$.36	
2-7/8"	2.791 - 2.913	70.9 - 74.0	EC740	\$.34	\$.32	EC740R	\$.39	\$.37	
3"	2.909 - 3.031	73.9 - 77.0	EC770	\$.35	\$.33	EC770R	\$.39	\$.37	

- **INSTALLS QUICKLY**
- **NO RETIGHTENING**
- **NO CLAMP CREEPING**
- **SAVES SPACE**

Compare an Oetiker Clamp to any other clamp for prices and quality. Oetiker has the ear with a "dimple". This simple design difference not only adds increased strength to the grip of the clamp, it also creates a spring-like action which permits the clamp to "breathe" without loosening. We also believe that the mechanical lock of the Oetiker Clamp is superior to any other joint. Spotwelding techniques are not used and therefore the possibility of failure due to corrosion at the spot weld is eliminated.

This clamp style can also be formed into an oval shape.

TECHNICAL INFORMATION

MATERIALS:

Zinc plated clamps are made of 1008/1010 carbon steel, hot dipped and galvanized to designation G 90 (ASTM A 525). It will withstand a salt spray test of 72 hours.

PRESSURE:

As a guideline, Oetiker 1-Ear Clamps have held 30 bar - 441 psi. This was done using a static water pressure test. 2-Ear Clamps 54 bar - 800 psi with 35 pulsating strokes per min.

IN STOCK

CUSTOMER CAUTION:

An inferior imitation of the high quality Oetiker Clamp is being sold by a competitor. Oetiker and PPE suggest you buy the best, buy from PPE



PLASTIC PROCESS EQUIPMENT, INC.

8303 CORPORATE PARK DRIVE
MACEDONIA, OHIO 44056-2300
216-367-7000 • FAX: 216-367-7022
TOLL FREE: 800-321-0562

6385 MONTESSOURI STREET
LAS VEGAS, NEVADA 89113-1186
702-433-6385 • FAX: 702-433-6388
TOLL FREE: 800-258-8877

www.ppe.com
e-mail: sales@ppe.com

Toll Free: USA, Canada & Mexico
800-362-0706

Order Fax: 800-223-8305