MINERAL INSULATED (MI) SUPER-HOT HEATER BANDS

HOTTER BANDS - LONGER LIFE

You will improve your productivity with longer-lived mineral-insulated nozzle heaters.

STOP BURNING OUT HEATER BANDS

MI BAND HEATER

CAPABLE OF 1,400°F


Rugged Construction Stainless steel cover, hardened stainless steel clamp bars, aluminum-oxide insulation, protected leads. Withstands the tough life of shock, vibration, and plastic drool that cause failure in common heaters.

High Temperatures Melt temperatures required by many of the newer engineering resins are routine for the MI nozzle heaters. They are capable of operating to 1,400°F!

High Wattages Throughput is key to your productivity. The demand for higher wattages required has been met. A 1-1/2" diameter by 1-1/2" wide MI nozzle heater can deliver up to 450 watts versus 300 watts for a mica band.

Simpler Design The mineral insulation is efficient without bulk or mass.

Wattage: Recommended, 50-60 Watts per sq. in.

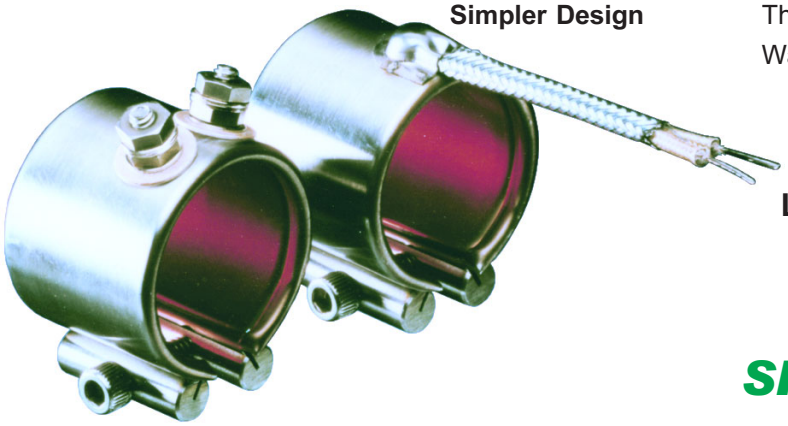


THE MI HEATER BAND SHOWED A LARGE % OF ENERGY SAVINGS OVER THE USE OF MICA HEATER BANDS. PLUS THEY LAST LONGER TO SAVE ON REPLACEMENT COSTS.

SPEND NOW, SAVE LATER

TERMINATION TYPE


Post

Strong, welded, trouble-free connections to internal windings. Screw thread size is 10-24. Ceramic terminal covers available for convenient safety insulation.

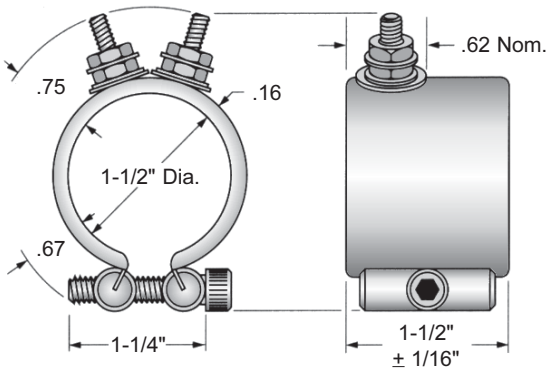

Flexible Type B Stainless Steel Overbraid

Two Fiberglass-insulated lead wires exit in a single metal braid for good abrasion protection, lead flexibility, and wiring convenience. Standard length is 12".

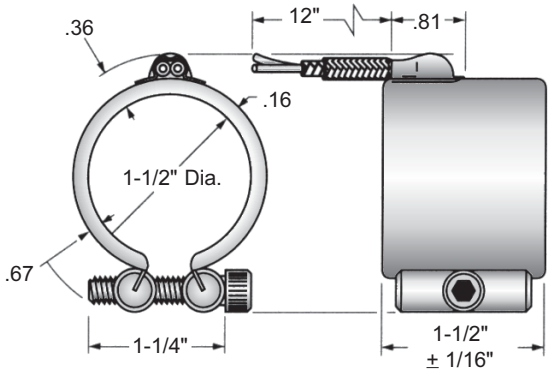

PPE
PLASTIC PROCESS EQUIPMENT, INC.

EAST
8303 CORPORATE PARK DRIVE
MACEDONIA, OHIO 44056-2300
216-367-7000 • FAX: 216-367-7022
TOLL FREE: 800-321-0562

WEST
6385 MONTESSOURI STREET
LAS VEGAS, NEVADA 89113-1186
702-433-6385 • FAX: 702-433-6388
TOLL FREE: 800-258-8877

www.ppe.com
e-mail: sales@ppe.com
Toll Free: USA, Canada & Mexico
800-362-0706
Order Fax: 800-223-8305