STARFLEX® HEATER BANDS

RUGGED, LONG LIFE ALUMINUM HEATERS

Made in USA




ISO 14001
MANUFACTURED IN AN ENVIRONMENTAL MANAGEMENT SYSTEM CERTIFIED FACILITY.

RoHS compliant

BUY FROM A CERTIFIED SOURCE!



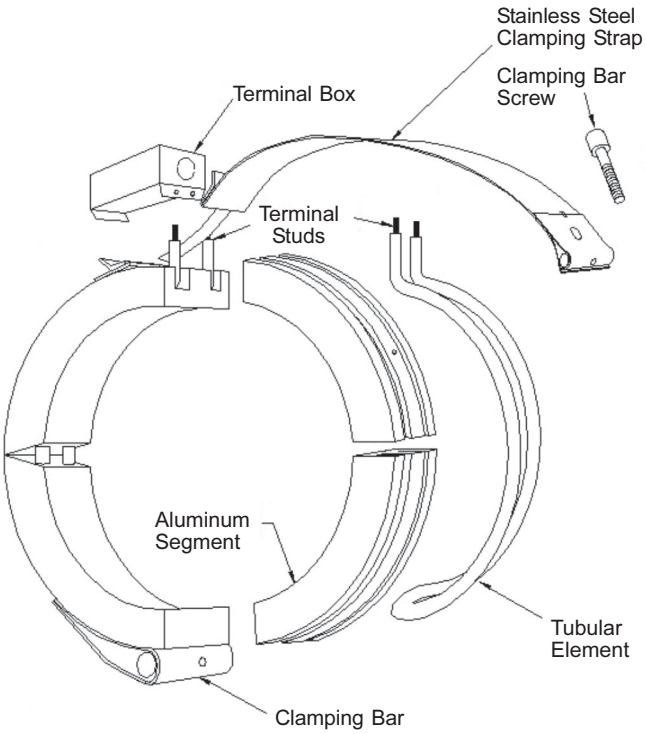

- Stocked with Terminal Box.
- The most rugged & reliable heater available.
- Long lasting tubular element.
- Practically contamination proof.
- Aluminum body provides excellent heat transfer to the barrel for uniform temperatures.
- Heaters open completely, allowing easy installation and eliminating the need to remove other items from the barrel.
- Durability of a cast-in heater at a fraction of the cost.
- Ideal for use on injection barrels, extruders and blow molding equipment.
- Dual voltage capability.

Starflex Heaters are manufactured by hydraulically pressing a highly efficient, rugged, long lasting tubular heater into a precision grooved aluminum channel. The heaters are clamped into place with low expansion stainless steel straps for the closest possible fit. These factors create a quick responding heater with uniform sheath temperatures, that is very resistant to contamination.

SPECIFICATIONS

• Max. Operating Temp:	650°F
• Max. Voltage:	277 Volts Per Half
• Max. Amps:	30 Amps
• Wattage Tolerance:	+5%, -10%
• Max. Watt Density:	40 Watts Per Sq. In.
• Min. Diameters:	1-1/2” wide bands = 3-1/2” I.D.
	2-1/2” wide bands = 5” I.D.
	3” wide bands = 5” I.D.
	4” wide bands = 5” I.D.
• Max. Diameter:	10 Ft.

PPE
PLASTIC PROCESS EQUIPMENT, INC.
EAST 8303 CORPORATE PARK DRIVE
MACEDONIA, OHIO 44056-2300
216-367-7000 • FAX: 216-367-7022
TOLL FREE: 800-321-0562
WEST 6385 MONTESSOURI STREET
LAS VEGAS, NEVADA 89113-1186
702-433-6385 • FAX: 702-433-6388
TOLL FREE: 800-258-8877
www.ppe.com
e-mail: sales@ppe.com
Toll Free: USA, Canada & Mexico
800-362-0706
Order Fax: 800-223-8305