




VARIABLE TRANSFORMERS

Dial your Output voltage from 0 to 17% Over Line...



All plug-in models come complete with grounded 3 prong line cord
NO EXTRAS TO BUY OR INSTALL

SPARE FUSE
ABC-12

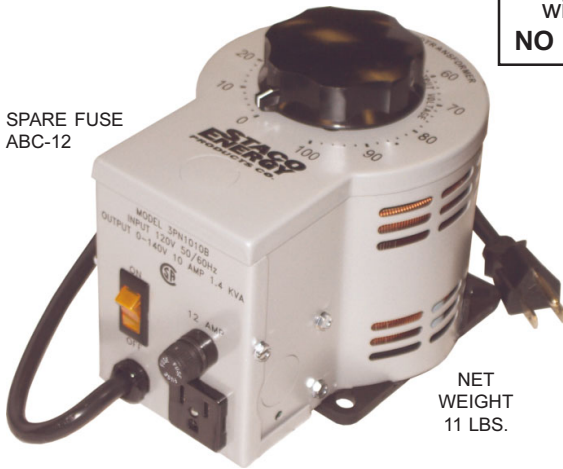

NET WEIGHT
11 LBS.

ISO-9001
MANUFACTURED IN A
QUALITY SYSTEM CERTIFIED
FACILITY.




10 Amp, 120 Volt = Constant Current 13 Amp, 120 Volt = Constant Impedance

PPE 10 Amp Model 3PN-1010 Voltage Control comes complete with ventilated steel case, 3 prong 120 volt OSHA approved grounded line cord, 3 prong 120 volt receptacle, lighted rocker switch, and fuse. This model operates at 120 volt input and 0-140 volts output. No special rewiring is necessary to operate the overvoltage feature.

CONTROLLING WATTAGE CAPACITY:
120 volt heaters up to 1200 watts

— PRICE —

Model 3PN-1010 \$536.00 ea.
120 volt input 0-140 volts output

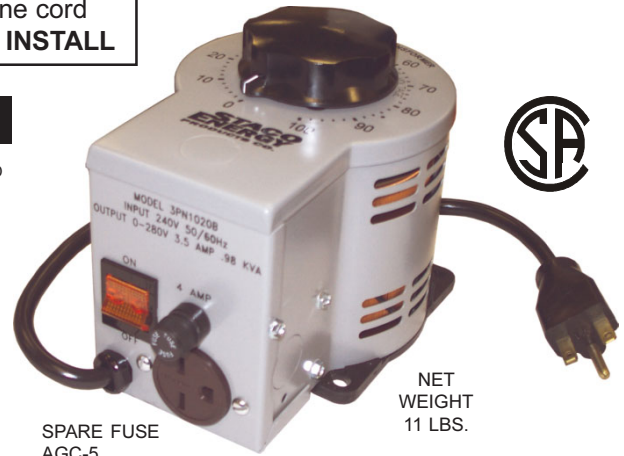

NET WEIGHT
11 LBS.

SPARE FUSE
AGC-5



3.5 Amp, 240 Volt = Constant Current 5.0 Amp, 240 Volt = Constant Impedance

PPE 3.5 Amp Model 3PN-1020 Voltage Control comes complete with ventilated steel case, 3 prong 240 volt OSHA approved grounded line cord, 3 prong 240 volt receptacle, lighted rocker switch and fuse. No rewiring is necessary to use the overvoltage feature.

CONTROLLING WATTAGE CAPACITY:
240 volt heaters up to 840 watts
220 volt heaters up to 770 watts
120 volt heaters up to 420 watts

— PRICES —

Model 3PN-1020 \$632.00 ea.
240 volt input 0-280 volts output

9.5 Amp, 240 Volt = Constant Current 12 Amp, 240 Volt = Constant Impedance

PPE 9.5 Amp Model 3PN-1520 Voltage Control comes complete with ventilated steel case, 3 prong 240 volt OSHA approved grounded line cord, 3 prong 240 volt receptacle, lighted rocker switch, and fuse. No special rewiring is necessary to operate the overvoltage feature.

CONTROLLING WATTAGE CAPACITY:
240 volt heaters up to 2280 watts
220 volt heaters up to 2090 watts
120 volt heaters up to 1140 watts

— PRICES —

Model 3PN-1520 \$968.00 ea.
240 volt input 0-280 volts output

For constant impedance application such as heater bands and cartridge heaters, all units are rated for higher amps (see listings) . User can change the fuse to suit. For constant current applications such as motors stay with constant current ratings listed.



NET WEIGHT
22 LBS.

SPARE FUSE
ABC-12



PLASTIC PROCESS EQUIPMENT, INC.

8303 CORPORATE PARK DRIVE
MACEDONIA, OHIO 44056-2300
216-367-7000 • FAX: 216-367-7022
TOLL FREE: 800-321-0562

6385 MONTESSOURI STREET
LAS VEGAS, NEVADA 89113-1186
702-433-6385 • FAX: 702-433-6388
TOLL FREE: 800-258-8877

www.ppe.com
e-mail: sales@ppe.com

Toll Free: USA, Canada & Mexico
800-362-0706

Order Fax: 800-223-8305