




NOZZLE INSULATOR CAPS

FOR USE BETWEEN NOZZLES AND SPRUE BUSHINGS

REDUCES HEAT TRANSFER

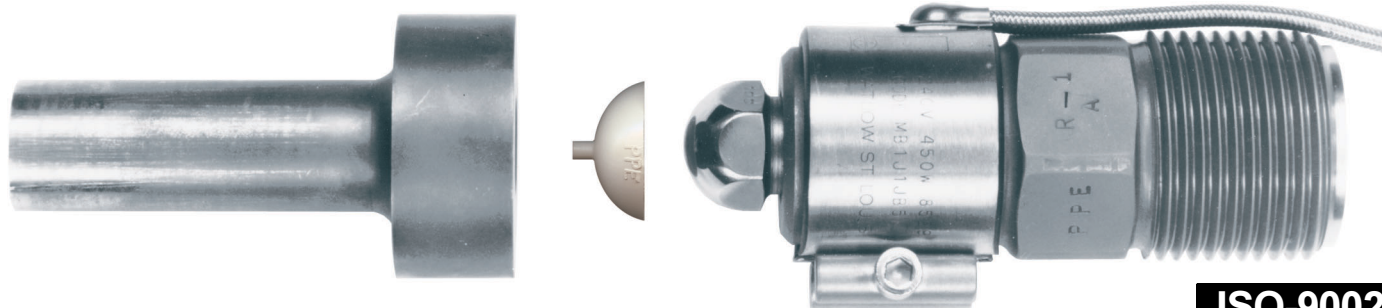

ISO-9002

MANUFACTURED IN A
QUALITY SYSTEM CERTIFIED
FACILITY.

SIMPLE BUT EFFECTIVE

DEVELOPED BY A PLASTICS
MOLDER FOR USE BY
PLASTIC MOLDERS!

- MADE OF SUPER HI-TEMP VECTRA® LCP PLASTICS WITH A MINERAL & GLASS ADDITIVE.
- TENSILE STRENGTH 2400 P.S.I.
- SOFTENS @ 520°F MELTS @ 635°F
- .025 WALL THICKNESS
- AVAILABLE IN 1/2 or 3/4 RADIUS

NOZZLE INSULATORS:

- Reduce heat transfer between nozzle and sprue bushing from 30° to 40°F.
- Permit lower nozzle operating temperatures to avoid overheating.
- Lower nozzle temperatures to reduce melt discoloration.
- Lower nozzle temperatures to stop drooling.
- Lower nozzle temperatures to improve molded part quality.
- Reduce the need to turn up nozzle heats to compensate for draw from cool sprue bushing.
- Shorten cycles due to faster sprue set-up.
- Improve seal between nozzle and sprue bushing.

— INSTALLS EASILY —

1. Place insulator cap on clean sprue bushing radius. Locator tab helps center cap. A small spot of grease on the outside diameter of cap radius will help hold it in place.
2. Bring the nozzle in place against the sprue bushing and begin molding. Your first shot will have the tab and orifice material embedded in the runner.

For runnerless systems or hot sprue bushings we suggest you drill out the insulator cap center to match your orifice size. This eliminates blocking your melt passages with the high temperature insulator cap material.

— PRICES —

NOZZLE INSULATOR CAPS

1/2" RADIUS, PART NO. NIC-12

10-49 Pcs	\$.85 ea.
50+	\$.80 ea.

3/4" RADIUS, PART NO. NIC-34

10-49 Pcs	\$.85 ea.
50+	\$.80 ea.



PLASTIC PROCESS EQUIPMENT, INC.

8303 CORPORATE PARK DRIVE
MACEDONIA, OHIO 44056-2300
216-367-7000 • FAX: 216-367-7022
TOLL FREE: 800-321-0562

6385 MONTESSOURI STREET
LAS VEGAS, NEVADA 89113-1186
702-433-6385 • FAX: 702-433-6388
TOLL FREE: 800-258-8877

www.ppe.com

e-mail: sales@ppe.com

Toll Free: USA, Canada & Mexico

800-362-0706

Order Fax: 800-223-8305