



MINILOAD VENTURI LOADERS

OPERATES ON COMPRESSED AIR

**500 LBS. PER HOUR – WHISPER QUIET
COST EFFECTIVE - AUTOMATIC OR MANUAL**

THE NO MOTOR LOADER™

- **ECONOMICAL:** Uses approximately 3 SCFM of compressed air per 100 lbs. per hour of material conveyed. Air supply to Venturi should be 100 P.S.I. but unit will operate as low as 80 P.S.I.
- **NO MOTOR – NO BRUSHES.**
- **FULLY AUTOMATIC:** Proximity sensor will start and stop the conveying of material. It's reversible.
- **EFFICIENT:** conveys virgin pellets or regrind with a bulk density of 35 Lbs. per cubic foot. Not for use with powders.
- **INSTALLS EASILY:** Install on hopper, material bin or directly on machine feed throat with 4 bolts. Requires a 100 P.S.I. compressed air supply and a 120/60/1 power supply. 2-1/8" dia. discharge hole.
- Proximity Switch Model PRX3B supplied as standard. It's adjustable to function both ways, Forward or Reverse Acting.

ISO 9001

MANUFACTURED IN A
QUALITY SYSTEM CERTIFIED
FACILITY.

**4
MODELS
AVAILABLE**


16 GA. 304
STAINLESS
STEEL HOPPER
(NOT MILD STEEL)

UNIT SHOWN WITH SIGHT
GLASS FOR VISIBILITY AT
THE THROAT. ALSO ALLOWS
PROXIMITY SWITCH TO SENSE
MATERIAL THROUGH THE
GLASS. (NOT PLASTIC)

ALUMINUM SIGHT GLASS ASSEMBLY HOLDS
6 OZ. OF VIRGIN POLYPROPYLENE #200202

PROXIMITY SWITCH
#PRX3

**Model MVLS1
with Sight Glass
& Proximity Switch
shown**

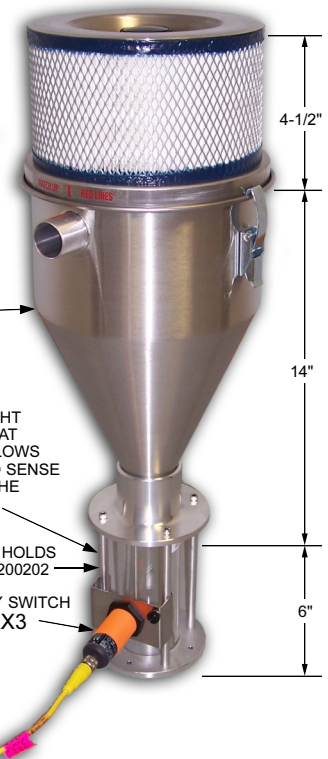

DESCRIPTION	SINGLE MATERIAL MODEL WITH SIGHT GLASS		SINGLE MATERIAL MODEL WITHOUT SIGHT GLASS		DUAL MATERIAL MODEL VIRGIN/REGRIND		MANUAL CONTROL MODEL	
	MVLS1		MVL1		MVL2		MVL3*	
MODEL NO.	MVLS1		MVL1		MVL2		MVL3*	
QUANTITY	1-3	4+	1-3	4+	1-3	4+	1-3	4+
PRICES	\$1,085.00	\$1,055.00	\$950.00	\$920.00	\$1,589.00	\$1,548.00	\$765.00	\$745.00
AIR PRESS. REQ'D	80 P.S.I.		80 P.S.I.		80 P.S.I.		80 P.S.I.	
AIR VOL. REQ'D	14 SCFM		14 SCFM		28 SCFM		14 SCFM	
INTAKE HOSE SIZE	1-1/4", 10' (Supplied)		1-1/4", 10' (Supplied)		1-1/4", 10' (2 Supplied)		1-1/4", 10' (Supplied)	
AIR LINE SIZE	3/8", 10' (Supplied)		3/8", 10' (Supplied)		3/8", 10' (2 Supplied)		3/8", 10' (Supplied)	
VOLTAGE REQ'D	120/60/1		120/60/1		120/60/1		120/60/1	
HOPPER SIZE	18-1/2" x 8" Dia.		18-1/2" x 8" Dia.		18-1/2" x 8" Dia.		18-1/2" x 8" Dia.	
FLANGE DIA.	5"		5"		5"		5"	
PROXIMITY SWITCH	YES		YES		YES		NO	
AIR REGULATOR & CONTROL ASSY.	#200208		#200208		MASTER #200203 SLAVE #200204		MANUAL TYPE #200226	

* Manual Model MVL3 Control Assembly will not accept a Proximity Switch.



PLASTIC PROCESS EQUIPMENT, INC.

www.ppe.com • e-mail: sales@ppe.com

PPE WEST 6385 Montessouri Street, Las Vegas, Nevada 89113
702-433-6385 • 800-258-8877 • Fax: 702-433-6388

PPE SOUTH 11218 Challenger Avenue, Odessa, Florida 33556
727-834-8888 • 800-282-6783 • Fax: 727-834-8873

8303 CORPORATE PARK DRIVE, MACEDONIA (Cleveland), OHIO 44056, USA

216-367-7000 • Toll Free: 800-321-0562 • Fax: 216-367-7022 • Order Fax: 800-223-8305

Toll Free: USA, Canada & Mexico
800-362-0706